

MTN80

MULTI-PURPOSE DISPLAY CABINET

ABACO®



Spices hot passion

MINA'S CLASSICO 4.99
 CONTADINO 4.99
 BABONETTO 4.99
 MEAT BALL HERO 4.99
 TANI MODI 4.99
 PEPPERINO 4.99
 DELICATO 4.99
 SPIZZICO 4.99
 MARINARO 4.99
 VEGAN 4.99

SALADS 4.50

Ante pasto

PIZZA slice 2.50



MTN80

Multi-purpose Display cabinet Serve-over

H 117-135

P 80

L 100-130-150



TN RV - Ventilated
TN RV CH - Chocolate
TC S - Dry heat
N - Non-refrigerated



Closing system with insulated double pane sliding doors with PVC frame.



Steel cabinet base with adjustable feet

Multi-purpose Display cabinet Self-service

H 117-135

P 80

L 100-130-150

Glass shelves with Led lighting

Insulated double pane
side glasses available
in two heights H117
and H135

Integrated night closing
curtain does not exceed
the footprint of glass



Closing system with insulated double pane sliding doors with PVC frame



MTN80 self-service has an optional side with an upper trapezoid-shaped glass panel. This solution, which increases the visibility and appeal of the product on display, is also available with the multiplex option when the last display case is self service.

Multiplexable with other MTN80 units in both the serve-over and self-service versions.

Steel cabinet base with adjustable feet

Operator side

Closing system with insulated double pane sliding doors with PVC frame



Glass structure with tilt front, LED lighting and sliding doors

H 117



5.700 K
4.000 K
3.000 K

The profile of the rear casing allows easy installation of a raised footboard



S/Steel
+ LED

Height-adjustable shelves



	H135 Self			H135		
	L100	L130	L150	L100	L130	L150
A	907x260 mm	1207x260 mm	1407x260 mm	907x400 mm	1207x400 mm	1407x400 mm
B	907x350 mm	1207x350 mm	1407x350 mm	907x400 mm	1207x400 mm	1407x400 mm
C	907x400 mm	1207x400 mm	1407x400 mm	907x400 mm	1207x400 mm	1407x400 mm
D	907x602 mm	1207x602 mm	1407x602 mm	907x602 mm	1207x602 mm	1407x602 mm



	H117 Self			H117		
	L100	L130	L150	L100	L130	L150
B	907x260 mm	1207x260 mm	1407x260 mm	907x400 mm	1207x400 mm	1407x400 mm
C	907x350 mm	1207x350 mm	1407x350 mm	907x400 mm	1207x400 mm	1407x400 mm
D	907x602 mm	1207x602 mm	1407x602 mm	907x602 mm	1207x602 mm	1407x602 mm

Self-service Glass structure



H 117



5.700 K
4.000 K
3.000 K



Adjustable shelves with integrated wireless lighting on electrified racks.

Top Led Light

Open front
with LED lighting
and sliding doors

H 135



5.700 K
4.000 K
3.000 K

MTN80

Serve-over Glass structure



Adjustable shelves with
integrated wireless lighting
on electrified racks

Top Led Light

**Glass structure
with tilt front,
LED lighting
and sliding doors**

H 117



5.700 K
4.000 K
3.000 K



Adjustable shelves with integrated wireless lighting on electrified racks

Top Led Light

Glass structure with tilt front, LED lighting and sliding doors

H 135




5.700 K
4.000 K
3.000 K

Cross sections RV TN


H 117-135

P 80


L 100-130-150

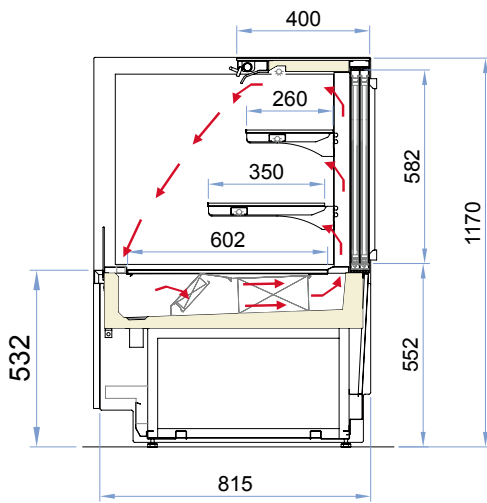


H117 Self-service with LED lights and sliding doors

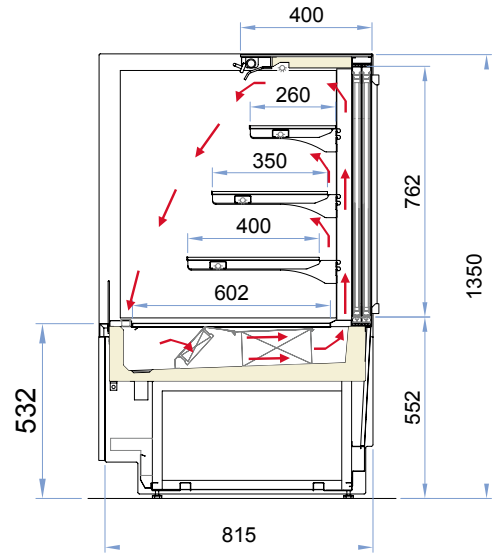

H135 Self-service with LED lights and sliding doors

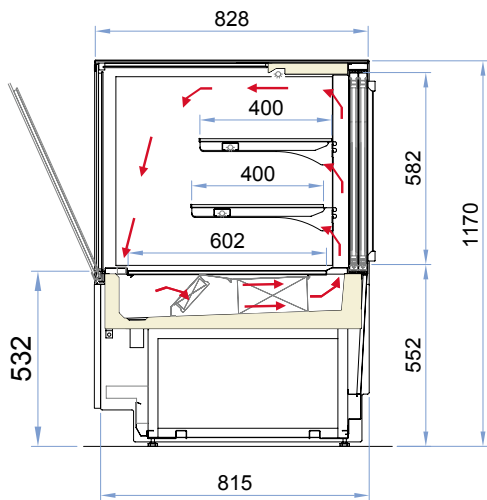

H117 Serve-over with tilt front glass, LED lights and sliding doors

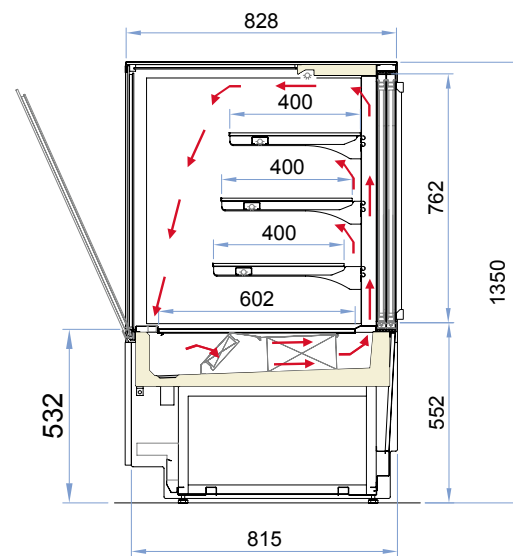




H135 Serve-over with tilt front glass, LED lights and sliding doors

Technical data

MTN80 UCB plug-in condensing unit

MODULE LENGTH	100	130	150
Climate class	3		
Climate conditions	25°C/60% UR		
Pastry/snack display operating temperature	-1/+5 °C		
Chocolate display operating temperature	+14/+16 °C		
Dry heat display operating temperature	65 °C		
Compressors [q.ty/ type]	1/ hermetic		
Defrost	compressor off-cycle		
Power supply [V/hz]	230/50/1Ph		
Refrigerant	R290		

VENTILATED

Heat extraction rate (Ørun) [W@-10]	880	1150	
Rated absorbed power [W/A]	530/3,1	550/3,1	
Absorbed power during defrost [W/A]	35/0,2	35/0,2	
Energy class			

CHOCOLATE DISPLAY

Heat extraction rate (Ørun) [W@-10]	880	880
Rated absorbed power [W/A]	750/4,2	770/4,3
Absorbed power during defrost [W/A]	35/0,2	35/0,2

DRY HEAT

Rated absorbed power [W/A]	800/3,5	930/4,2
----------------------------	---------	---------

MTN80-S UCB plug-in condensing unit

MODULE LENGTH	100	130	150
Climate class	3		
Climate conditions	25°C/60% UR		
Pastry/snack display operating temperature	-1/+7 °C		
Compressors [q.ty/ type]	1/ hermetic		
Defrost	compressor off-cycle		
Power supply [V/hz]	230/50/1Ph		
Refrigerant	R290		

VENTILATED

Heat extraction rate/Richiesta Frigo (Ørun) [W@-10]	1600	1800	
Rated absorbed power [W/A]	850/3,9	910/4,1	
Absorbed power during defrost [W/A]	60/0,3	60/0,3	
Energy class	