



SNK80-A

SNACK DISPLAY CABINET HIGH DECK

ABACO®



Snack display cabinet with high deck

H 117-135

P 80

L 100-125-150-175-200



TN RV - Ventilated

TN RV - Ventilated with refrigerated storage

TN RV PC - Ventilated and hot plate convertible

TN RV PC - Ventilated and hot plate convertible with refrigerated storage

TN RV CH - Chocolate display

TN RV CH - Chocolate display with refrigerated storage

TC S - Dry heat



R290

Closing system with slides in transparent methacrylate with easy sliding system. Stainless steel worktop



Steel cabinet base with adjustable feet. Wheels optional.

SNK80-A

Snack display cabinet with high deck corner unit

H 117-135

P 80

L TDX150-TSX150



Tempered glass with extra clear finish with Led lighting. Available in two heights H117 and H135

Tilt front glass for ease of cleaning

Glass shelves (with LED lighting option)

TN RV - Ventilata

TN RV PC - Ventilated and hot plate convertible

TN RV CH - Chocolate display

TC S - Dry heat



R290

Closing system with slides in transparent methacrylate with easy sliding system. Stainless steel worktop



Steel cabinet base with adjustable feet

SNK80-A

Glass structure configurations

Tilt front glass



**Glass structure
with tilt front,
LED lighting
and sliding doors**

H 117



5.700 K
4.000 K

Tilt front glass

Intermediate shelves
with lighting and heating option




**Glass structure
with tilt front,
LED lighting
and sliding doors**

H 135




5.700 K
4.000 K

Operator side

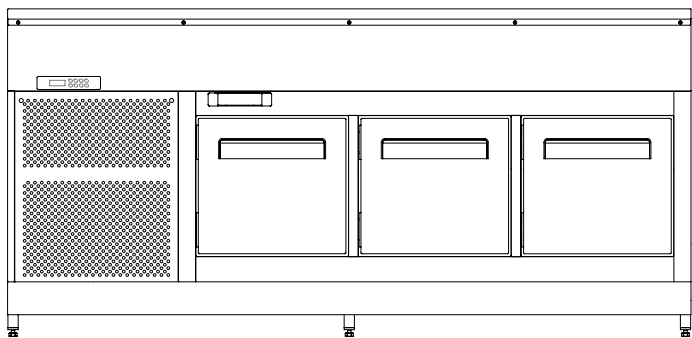

TN refrigerated storage

Module length	UCB (plug-in)	UCR (remote)
100	-	-
125	-	2-door
150	2-door	2-door
175	2-door	3-door
200	2 or 3 door	2 or 3 door
TDX	-	-
TSX	-	-

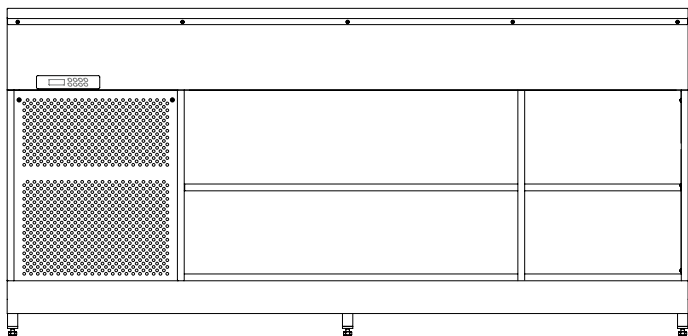

Open storage

Open storage with height adjustable shelves.

Customization



**Display deck,
front profile
and side profiles
can be customized.**

Black RAL 9004
RAL choice



**Hot plate in ceramic
material Laminam™**


Dark grey finish

Cross sections

TN RV

TN RV PC

TN RV CH

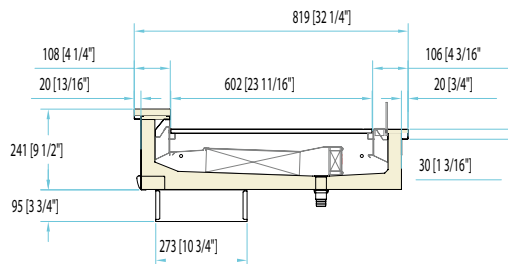


Well

H 117-135


P 80

L 100-125-150-175-200


TDX150-TSX150

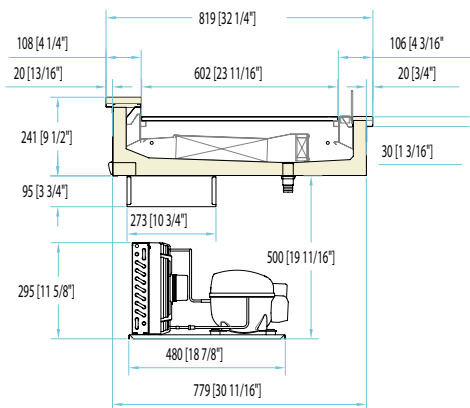

Well with factory-connected condensing unit

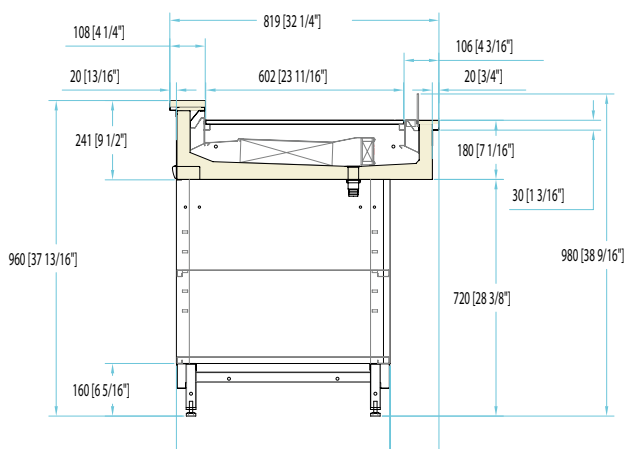

Well on neutral counter base

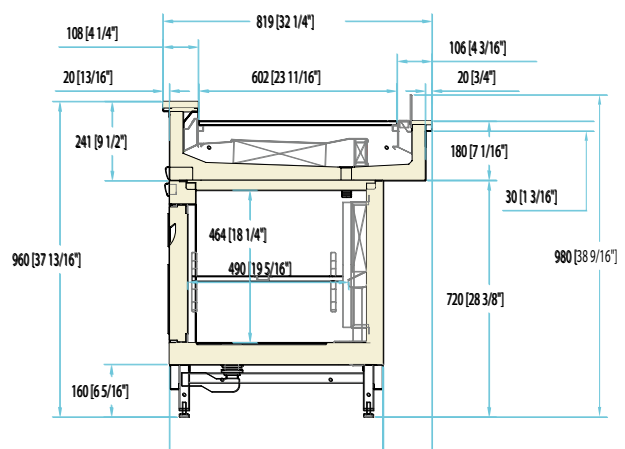

Well on refrigerated storage counter base

TN RV - Ventilated

TN RV - Ventilated with refrigerated storage

TN RV PC - Ventilated and hot plate convertible

TN RV PC - Ventilated and hot plate convertible with refrigerated storage


TN RV CH - Chocolate display

TN RV CH - Chocolate display with refrigerated storage


TC S - Dry heat



R290

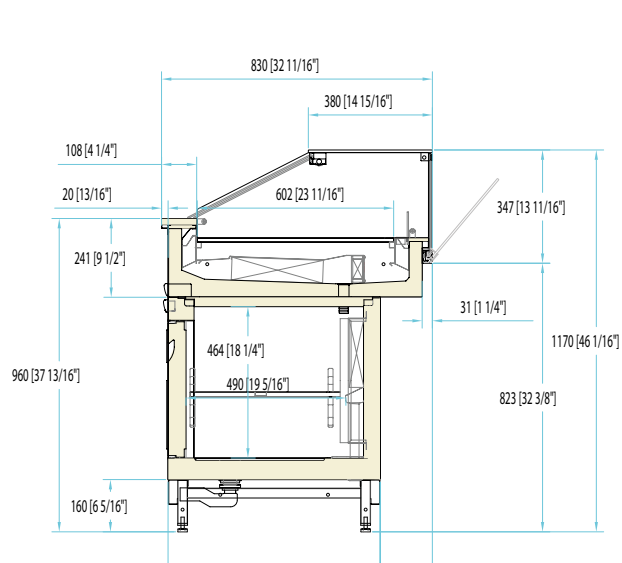


H117 Display cabinet with lighted tilt glass structure and refrigerated storage

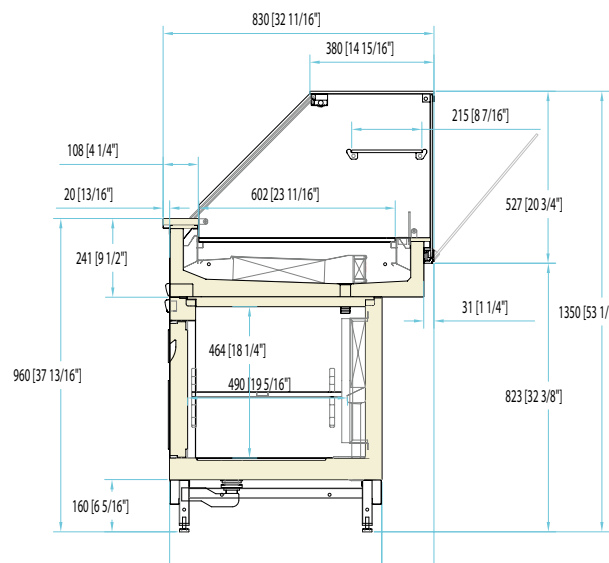

H135 Display cabinet with lighted tilt glass structure and refrigerated storage

Cross sections TC S

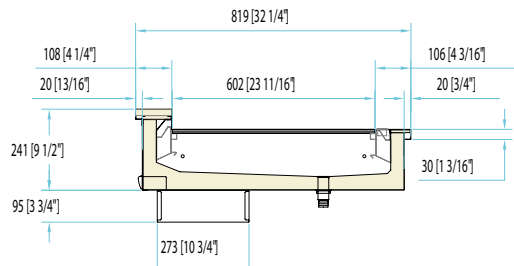


Well

H 117-135


P 80

L 100-125-150-175-200


TDX150-TSX150

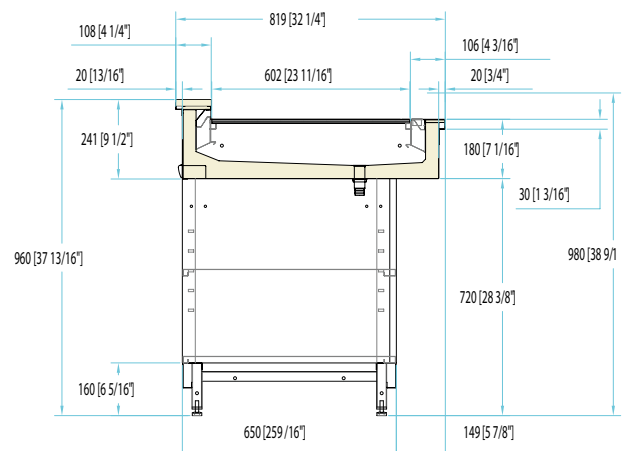

Well on neutral counter base

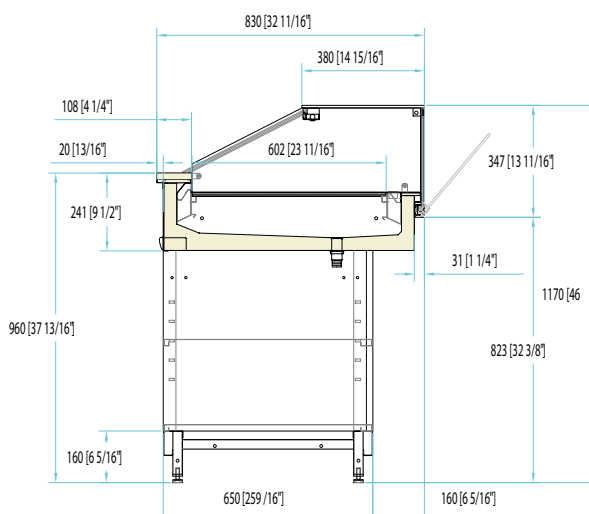

H117 Display cabinet with lighted tilt glass structure and refrigerated storage

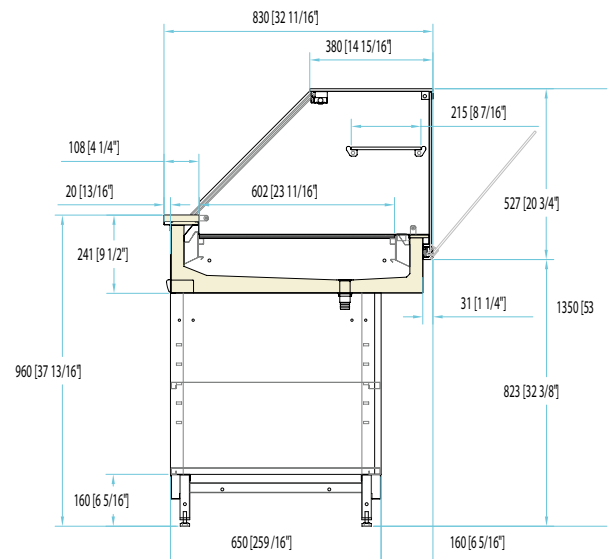

H135 Display cabinet with lighted tilt glass structure and refrigerated storage

Technical data

UCB plug-in condensing unit

MODULE LENGTH	100	125	150	175	200
Climate class	3				
Climate conditions	25°C/60% UR				
Ventilated refrigeration operating temperature	-1/+7 °C				
Chocolate display operating temperature	+14/+16 °C				
Hot plate operating temperature	65 °C				
Compressors [q.ty/ type]	1/ hermetic				
Defrost	compressor off-cycle				
Power Supply [V/hz]	230/50				
Refrigerant	R290				

VENTILATA

Heat extraction rate (Ørun) [W@-10]	721	721	934	934	1099
Rated absorbed power [W/A]	411/2,9	418/3	498/3,6	504/3,65	567/4,1
Absorbed power during defrost [W/A]	56/0,4	63/0,45	78/0,56	84/0,61	97/0,7
Energy class					

CHOCOLATE DISPLAY

Heat extraction rate (Ørun) [W@-10]	721	721	721	934	1099
Rated absorbed power [W/A]	595/2,69	502/2,72	597/3,2	603/3,3	788/4,3
Absorbed power during defrost [W/A]	242/1,32	249/1,35	307/1,66	313/1,7	450/2,44

DRY HEAT

Rated absorbed power [W/A]	740/3,6	930/4,5	1120/5,4	1320/6,4	1500/7,2
----------------------------	---------	---------	----------	----------	----------

VENTILATED REFRIGERATION - UCR remote condensing unit

MODULE LENGTH	100	125	150	175	200
Refrigerants	R404A/ R452A				
Climate class	4				
Climate conditions	30°C/55% UR				
Defrost	compressor off-cycle				
Power Supply [V/hz]	230/50				
Absorbed power [W/A]	56	63	78	84	97
Absorbed power of remote condensing unit [W]	486	486	760	760	660
Condensing unit weight [kg]	14,8	14,8	20	20	25,5
Condensing unit dimensions LxDxH[mm]	480x330x295	480x330x295	500x330x297	500x330x297	490x385x295
Refrigerant piping diameter: Liquid/Suction 0-15mt	12/8	12/8	12/8	12/8	12/8
Refrigerant piping diameter : Liquid/Suction 16-30mt	14/8	14/8	14/8	14/8	14/8

CHOCOLATE DISPLAY - UCR remote condensing unit

MODULE LENGTH	100	125	150	175	200
Refrigerants	R404A/ R452A				
Climate class	4				
Climate conditions	30°C/55% UR				
Defrost	compressor off-cycle				
Power Supply [V/hz]	230/50				
Absorbed power [W/A]	243	249	307	313	450
Absorbed power of remote condensing unit [W]	486	486	486	760	760
Condensing unit weight [kg]	14,8	14,8	14,8	20	25,5
Condensing unit dimensions LxDxH[mm]	480x330x295	480x330x295	480x330x295	500x330x297	500x330x297
Refrigerant piping diameter: Liquid/Suction 0-15mt	12/8	12/8	12/8	12/8	12/8
Refrigerant piping diameter : Liquid/Suction 16-30mt	14/8	14/8	14/8	14/8	14/8