

Bar counters

H 96-105
P 58-65
L 50 to 400

Worktop in stainless steel AISI304 18/10 polished
BA finish with MDF core.
Possibility of single top up to 4 m.



Shelves in stainless steel AISI304 18/10
BA polished finish.

Stainless steel cabinet base.
Wheels optional.

TN RV - Ventilated

TN RSM - Static chiller

TB RSM - Static freezer


R290

Possibility of inserting flush-fitted
sinks with localized overflow.



Drawer units (optional)
1/2x2
1/3x3
1/3+2/3

Preconfigured

Premium and Basic bar counters

H 96-105

P 58-65

**L 50-100-150-200-250
300-350-400**



TN RV - Ventilated


TN RSM - Static chiller

TB RSM - Static freezer


R290



Bar Counters

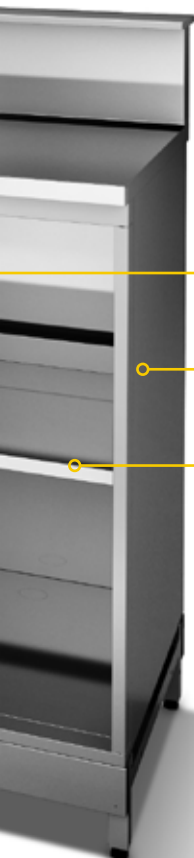

PREMIUM

Shelves, side and back panels
in polished stainless steel

BASIC

Polished stainless steel
shelves, without backrest
and without side panel

Back bar counters

H 96-105
P 40-58-65
L 50 to 400

Sliding doors with AISI304 18/10 stainless steel with polished BA finish featuring a soft closing system.



Internal shelves in stainless steel AISI304 18/10 polished BA finish with "anti-fall" edges.

TN RV - Ventilated

TN RSM - Static chiller

TB RSM - Static freezer

aria

R290

Worktop in stainless steel AISI304 18/10 polished BA finish with MDF core. Possibility of single top up to 4 m.

Boxed splashback riser provides space for electrical outlets housing and support for wall shelving units.



Hinged doors in stainless steel AISI304 18/10 polished BA finish featuring a soft closing system.


**Cross sections
and data sheets**

BAR COUNTERS


ABACO®

TN refrigerated
bar counters
without worktop


H 93
P 58-65
• RV-RSM

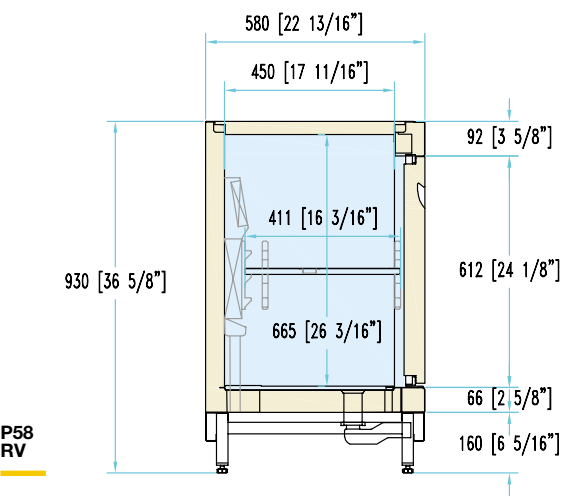


P58
RV

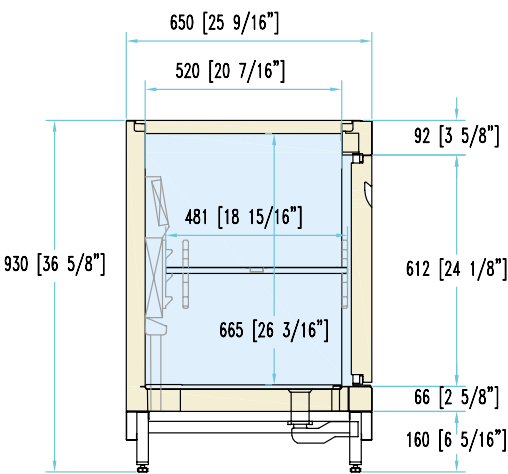

P65
RV

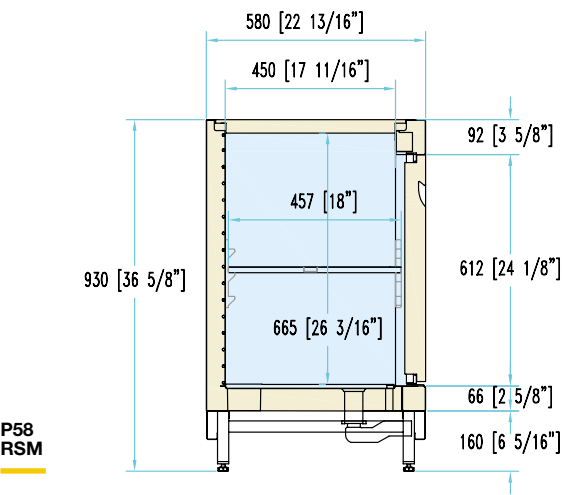

P58
RSM

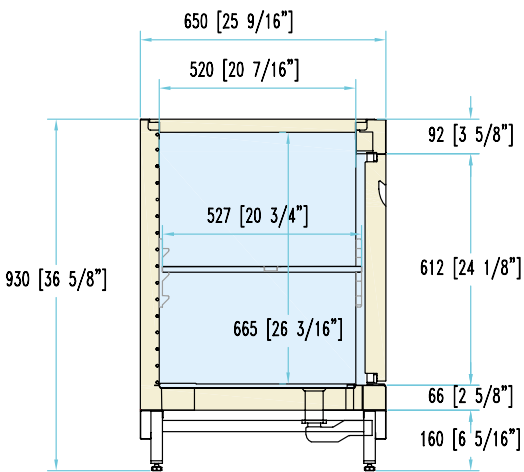


P65
RSM

Without side and back panels on neutral sections


			mm	Inch
	SCARICO	DRAIN PIPE	Ø40-Ø20	Ø1.5"-Ø3/4"
	ALLACCIAMENTO GAS	REFRIGERANT PIPING	Ø8-Ø6	

TN refrigerated
bar counters
with worktop
without backsplash riser


H 96
P 58-65
• RV-RSM

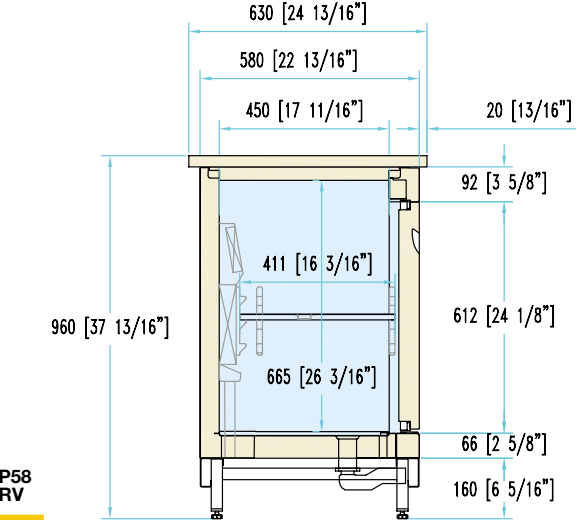


P58
RV

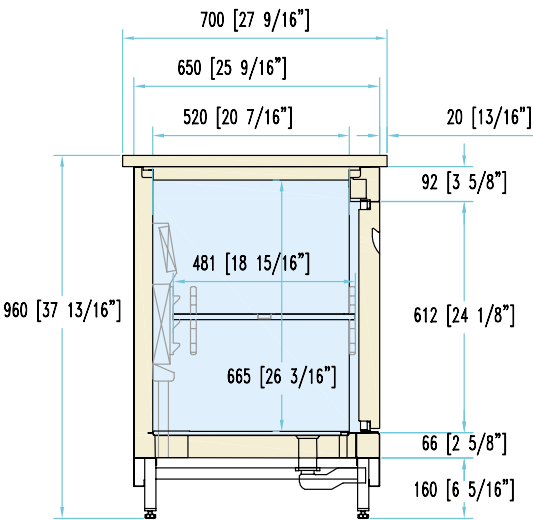

P65
RV

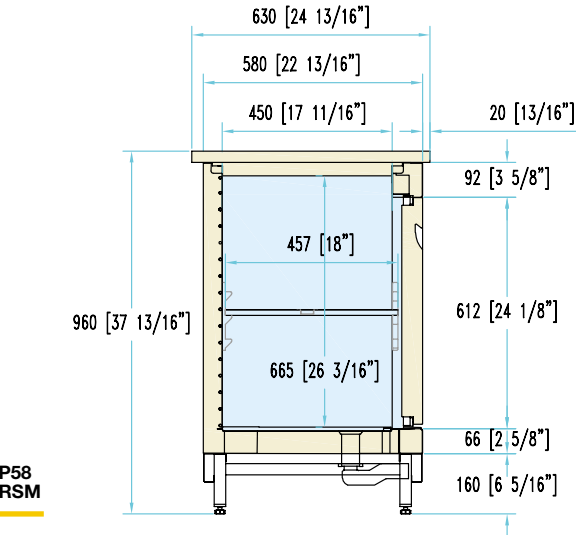

P58
RSM

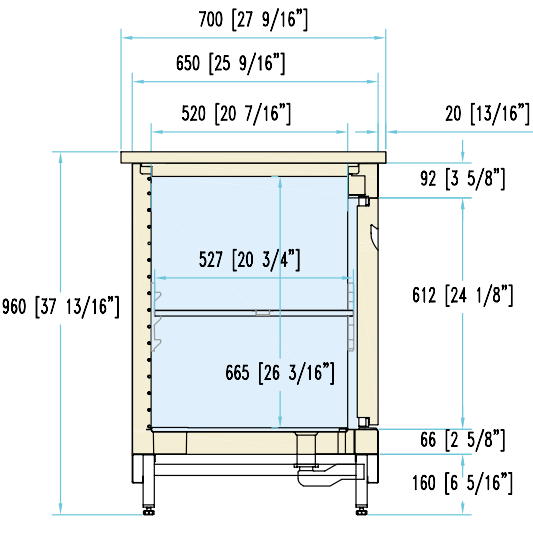





P65
RSM

Without side and back panels on neutral sections

			mm	Inch
	SCARICO	DRAIN PIPE	Ø40-Ø20	Ø1.5"-Ø3/4"
	ALLACCIAMENTO GAS	REFRIGERANT PIPING	Ø8-Ø6	

TN refrigerated
bar counters
with worktop
with backsplash riser
and countertop support

H 115
P 58-65
• RV-RSM

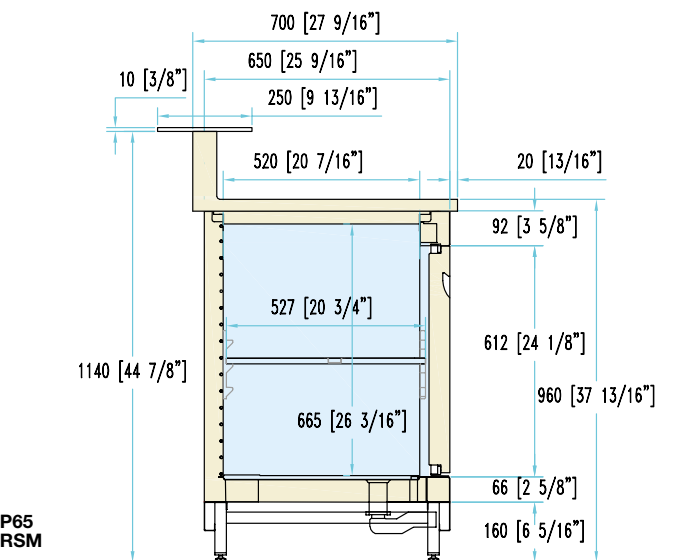
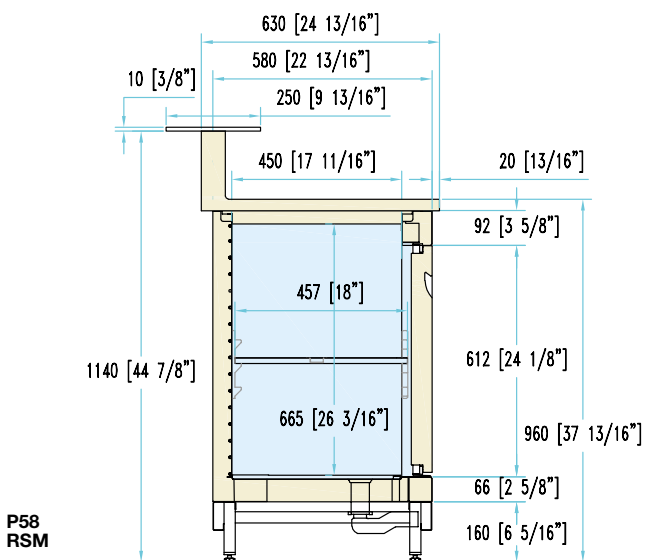
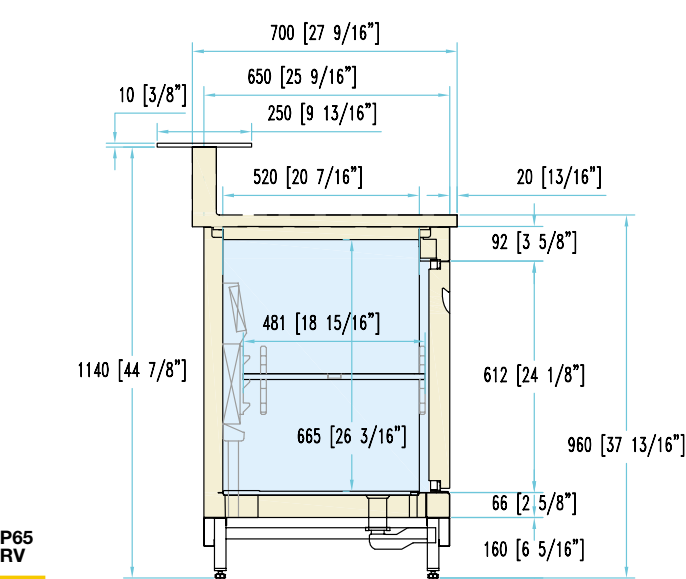
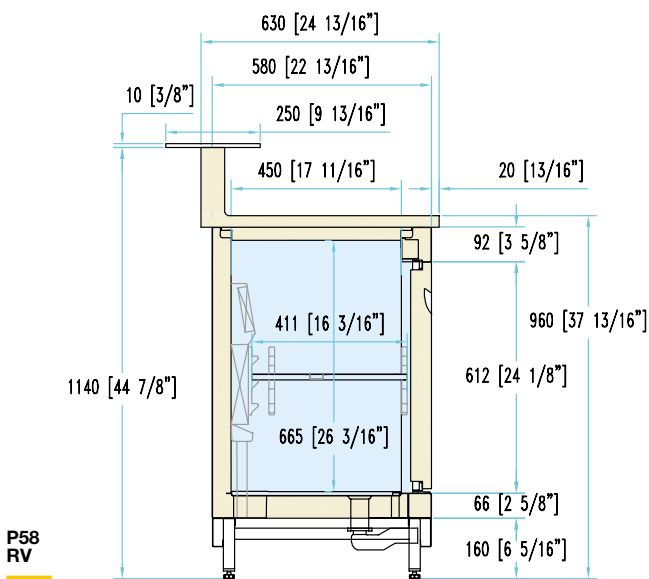


Without side and back panels on neutral sections

			mm	Inch
	SCARICO	DRAIN PIPE	Ø40-Ø20	Ø1.5"-Ø3/4"
	ALLACCIAMENTO GAS	REFRIGERANT PIPING	Ø8-Ø6	

TN refrigerated
bar counters
without worktop

H 93
P 58-65
• RV-RSM

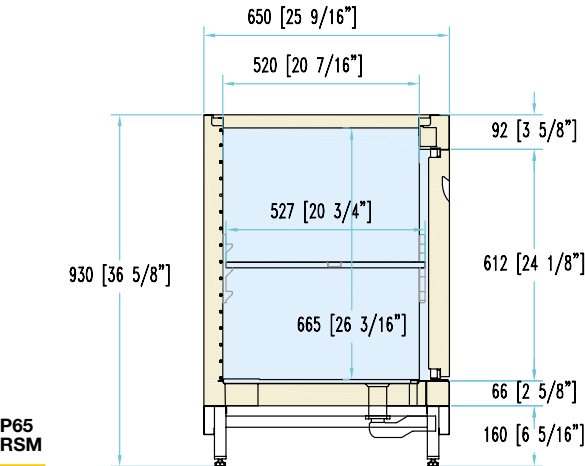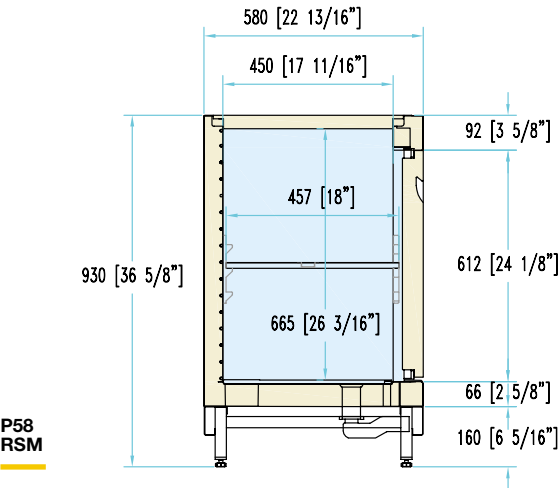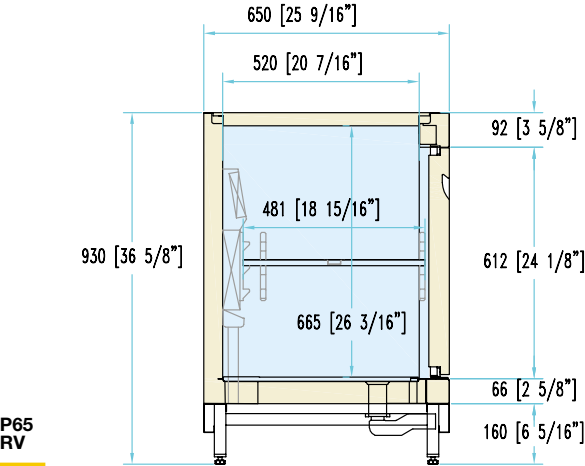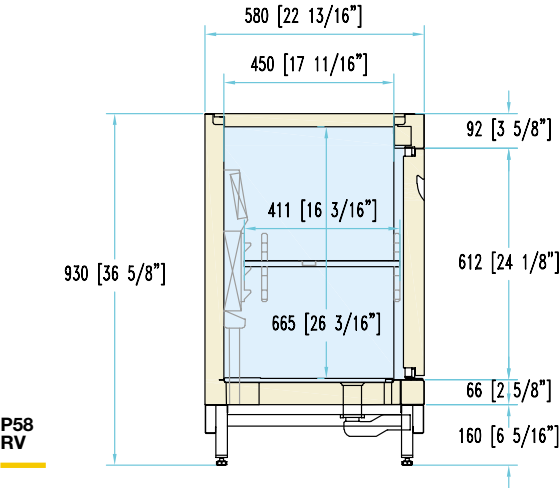


With S/S side and back panels on neutral


			mm	Inch
	SCARICO	DRAIN PIPE	Ø40-Ø20	Ø1.5"-Ø3/4"
	ALLACCIAMENTO GAS	REFRIGERANT PIPING	Ø8-Ø6	

TN refrigerated
bar counters
with worktop
without backsplash riser


H 96
P 58-65
• RV-RSM

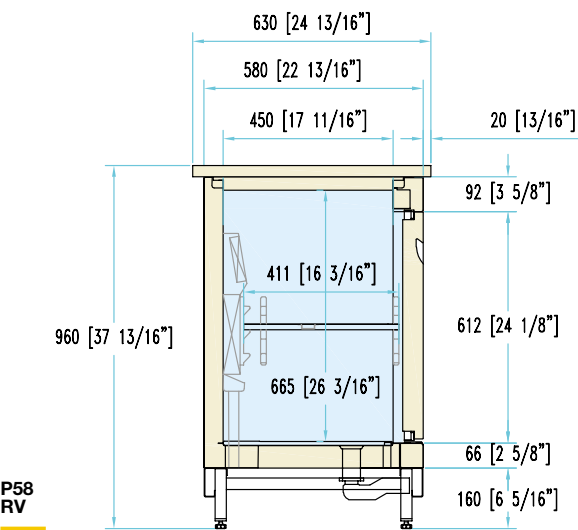


P58
RV

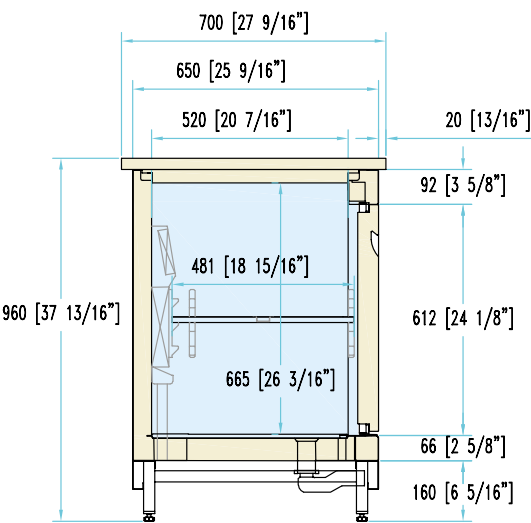

P65
RV

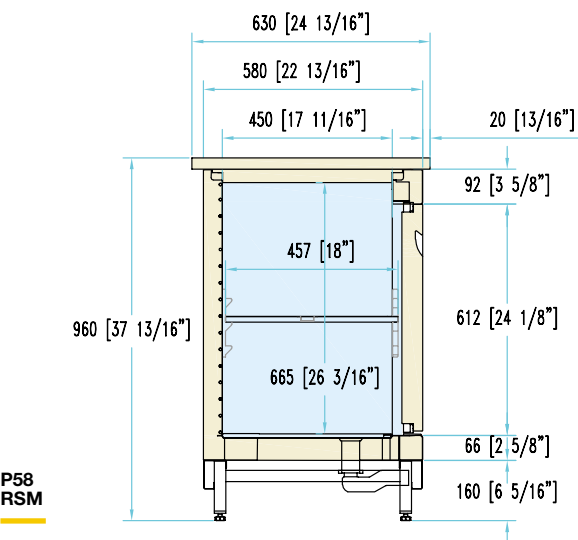

P58
RSM

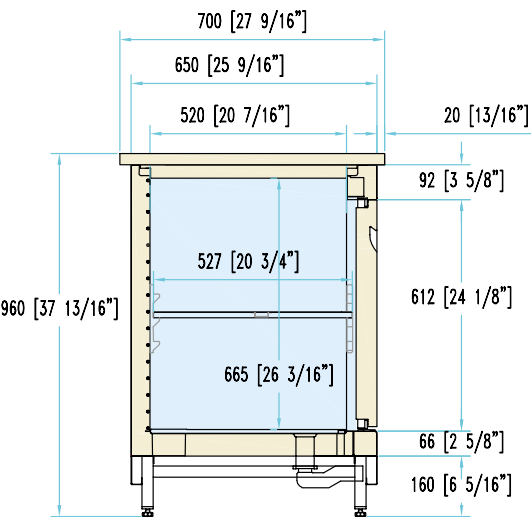

P65
RSM


With S/S side and back panels on neutral sections

			mm	Inch
	SCARICO	DRAIN PIPE	Ø40-Ø20	Ø1.5"-Ø3/4"
	ALLACCIAMENTO GAS	REFRIGERANT PIPING	Ø8-Ø6	


TN refrigerated
bar counters
with worktop
with backsplash riser
and countertop support

H 115
P 58-65
• RV-RSM


P58
RV

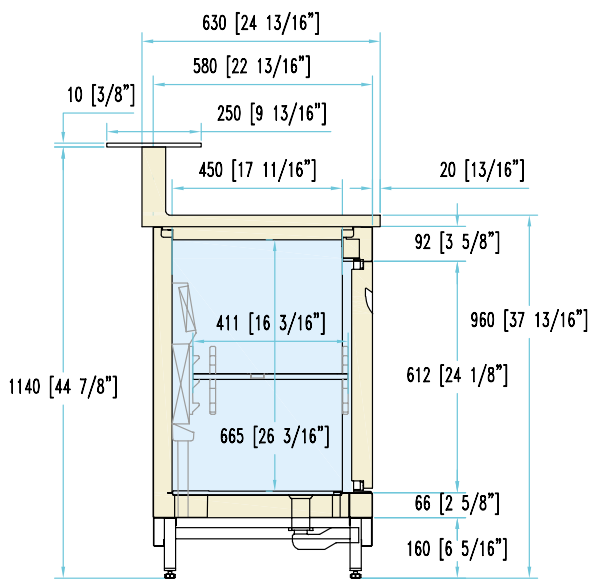


P65
RV

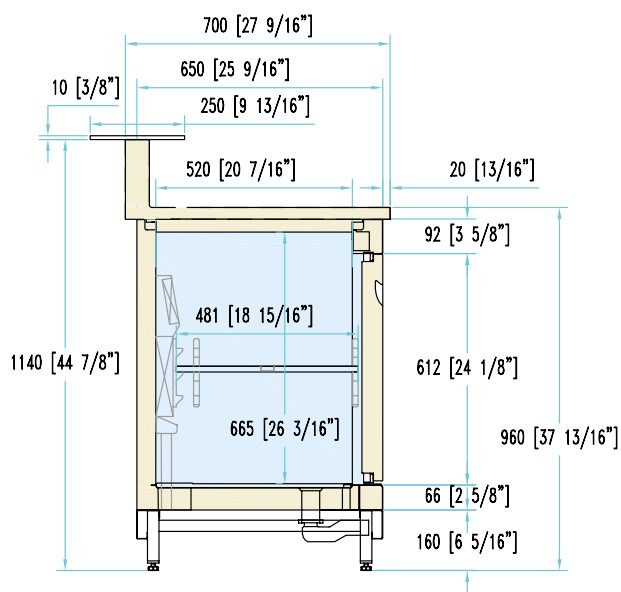

P58
RSM

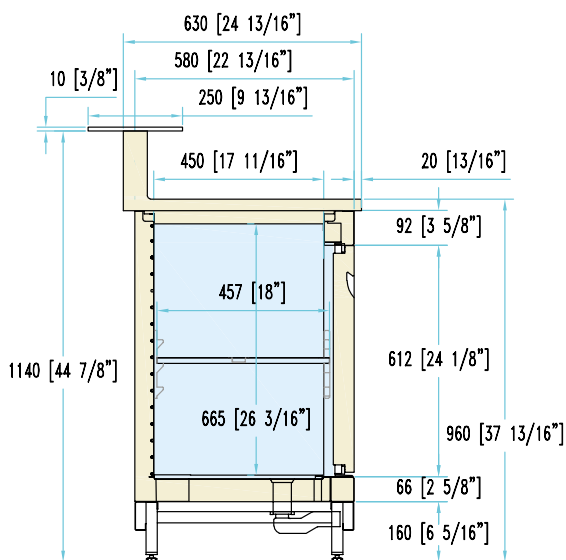

P65
RSM

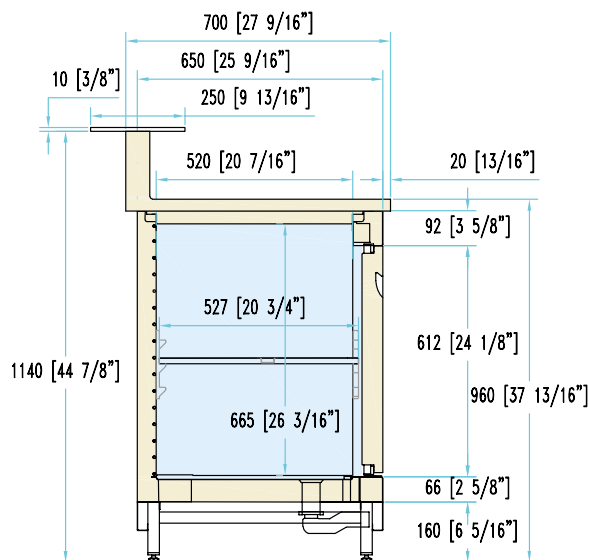

With S/S side and back panels on neutral sections


			mm	Inch
	SCARICO	DRAIN PIPE	Ø40-Ø20	Ø1.5"-Ø3/4"
	ALLACCIAMENTO GAS	REFRIGERANT PIPING	Ø8-Ø6	

TB freezer counters


without worktop

H 93
P 58-65
 • RSM

**P58
RSM**

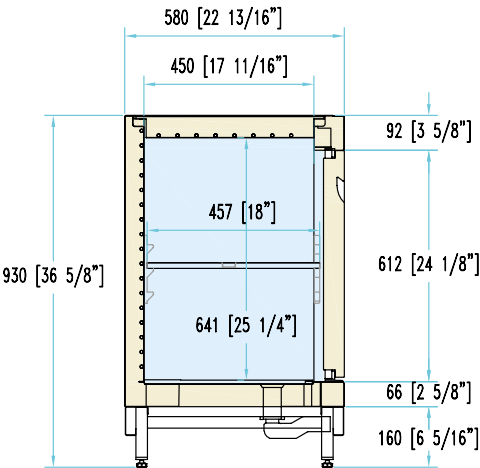

**P65
RSM**

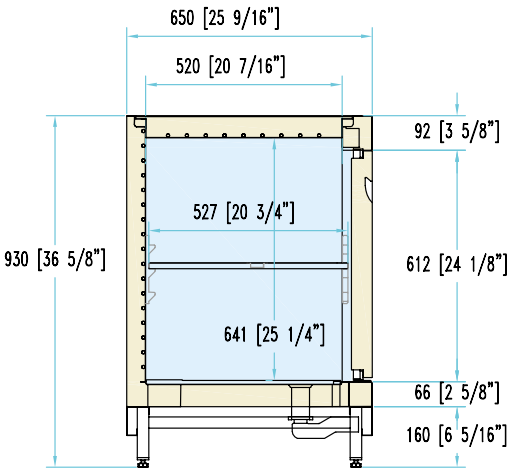


			mm	Inch
	SCARICO	DRAIN PIPE	Ø40-Ø20	Ø1.5"-Ø3/4"
	ALLACCIAMENTO GAS	REFRIGERANT PIPING	Ø8-Ø6	


TB freezer counters

with worktop
without backsplash riser

H 96
P 58-65
• RSM

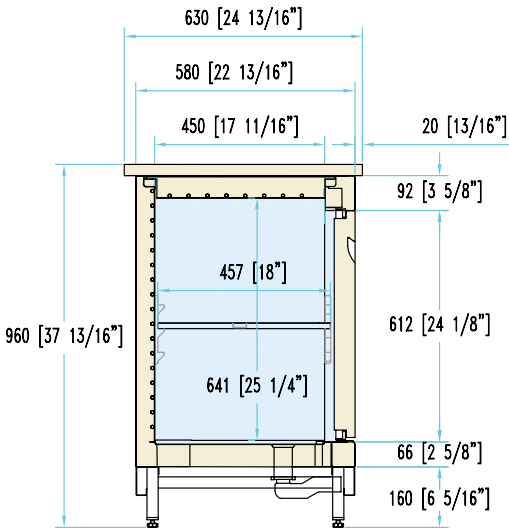

P58
RSM

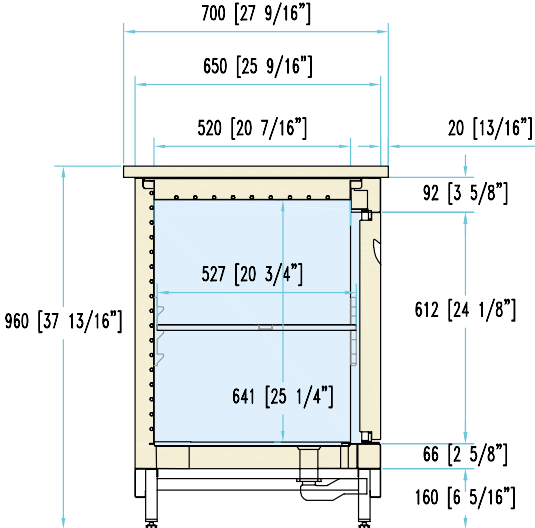



P65
RSM

			mm	Inch
	SCARICO	DRAIN PIPE	Ø40-Ø20	Ø1.5"-Ø3/4"
	ALLACCIAMENTO GAS	REFRIGERANT PIPING	Ø8-Ø6	

TB freezer counters

with worktop
with backsplash riser
and countertop support





H 115
P 58-65
• RSM

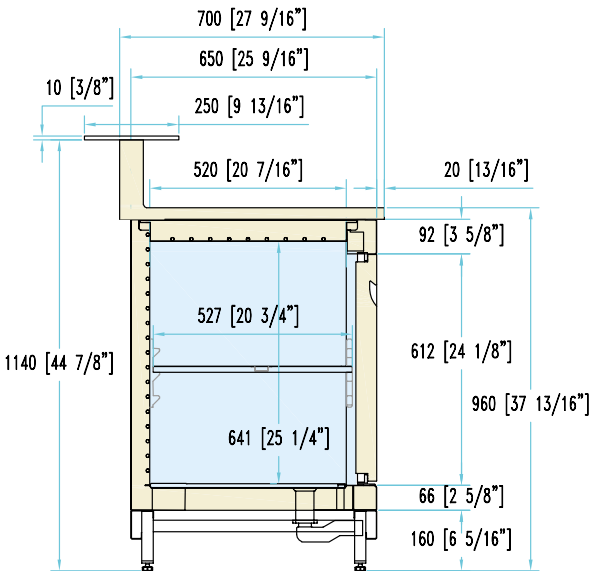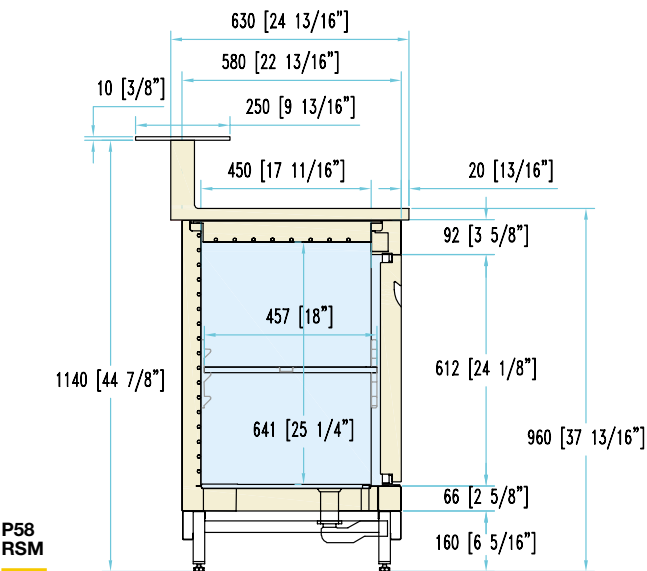

			mm	Inch
	SCARICO	DRAIN PIPE	Ø40-Ø20	Ø1.5"-Ø3/4"
	ALLACCIAMENTO GAS	REFRIGERANT PIPING	Ø8-Ø6	

TN refrigerated bar counters without worktop

H 102
P 58-65
• RV-RSM

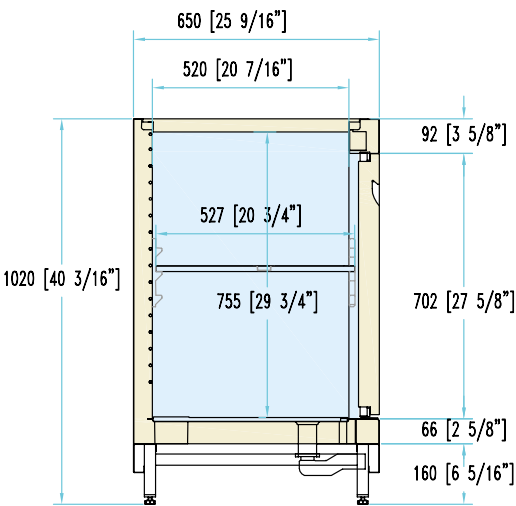
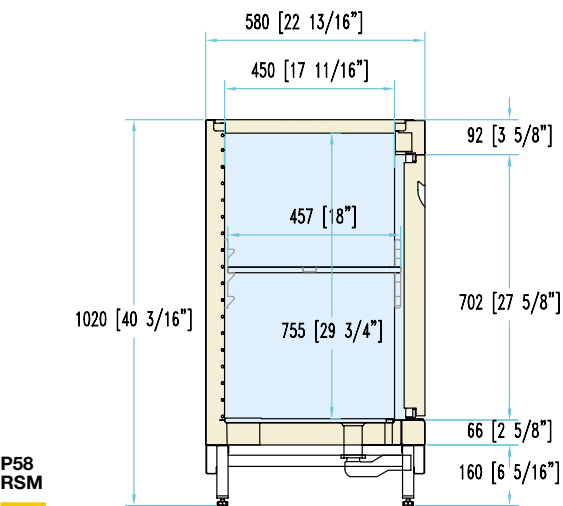
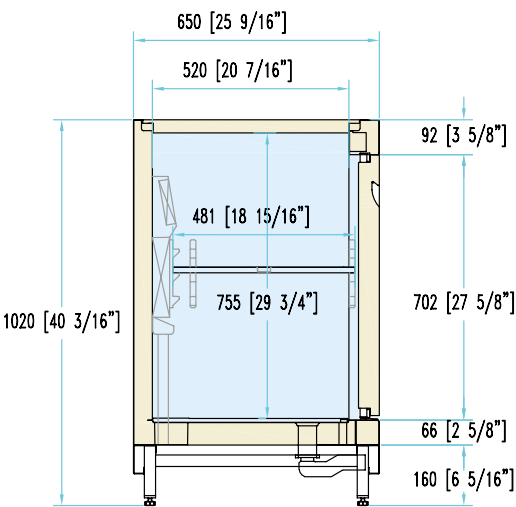
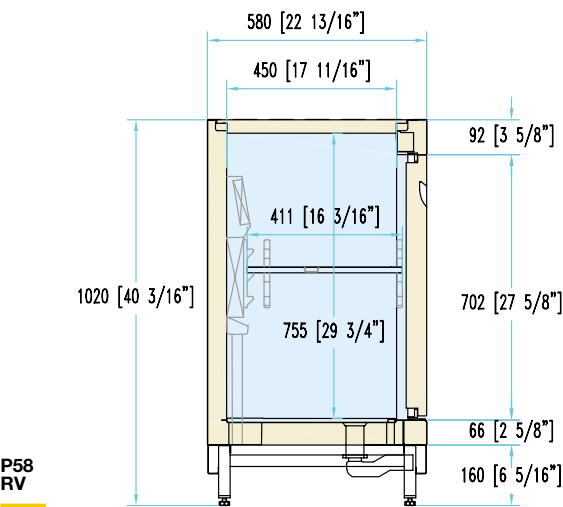


With S/S side and back panels on neutral sections

			mm	Inch
	SCARICO	DRAIN PIPE	Ø40-Ø20	Ø1.5"-Ø3/4"
	ALLACCIAMENTO GAS	REFRIGERANT PIPING	Ø8-Ø6	

TN refrigerated
bar counters
with worktop
without backsplash riser

H 105
P 58-65
• RV-RSM

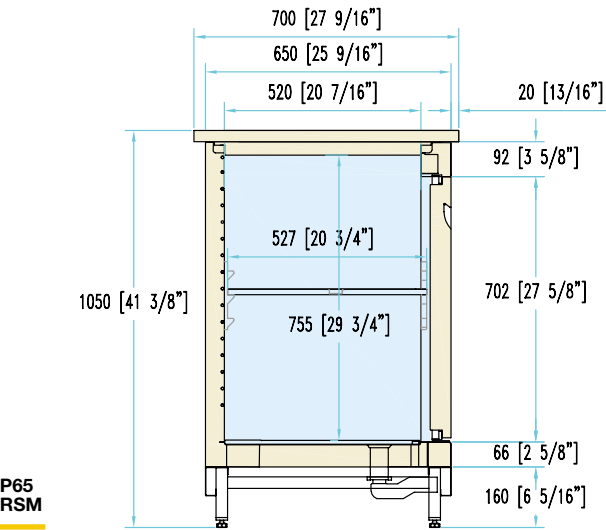
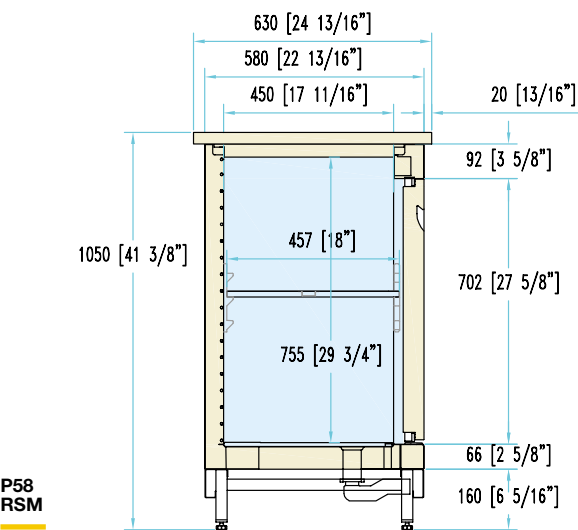
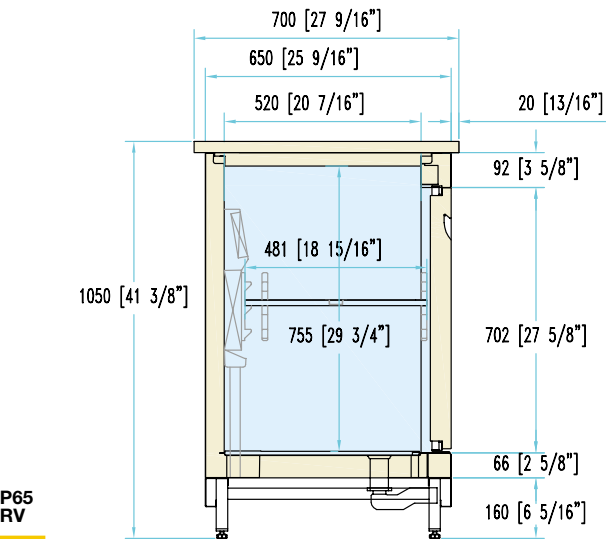
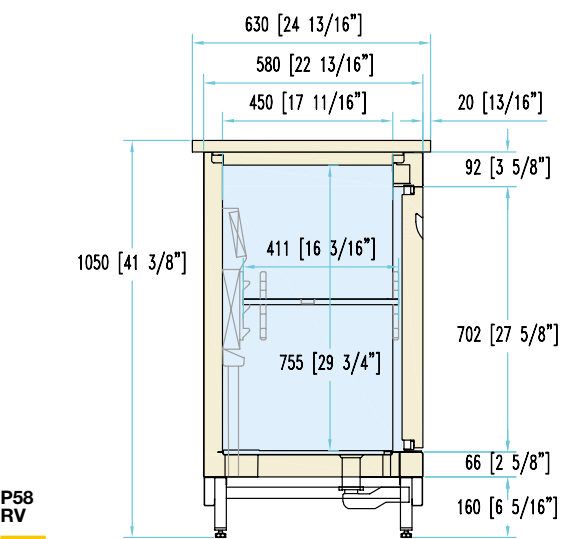


With S/S side and back panels on neutral sections

			mm	Inch
	SCARICO	DRAIN PIPE	Ø40-Ø20	Ø1.5"-Ø3/4"
	ALLACCIAMENTO GAS	REFRIGERANT PIPING	Ø8-Ø6	

TN refrigerated
bar counters
with worktop
with backsplash riser
and countertop support

H 124
P 58-65
• RV-RSM

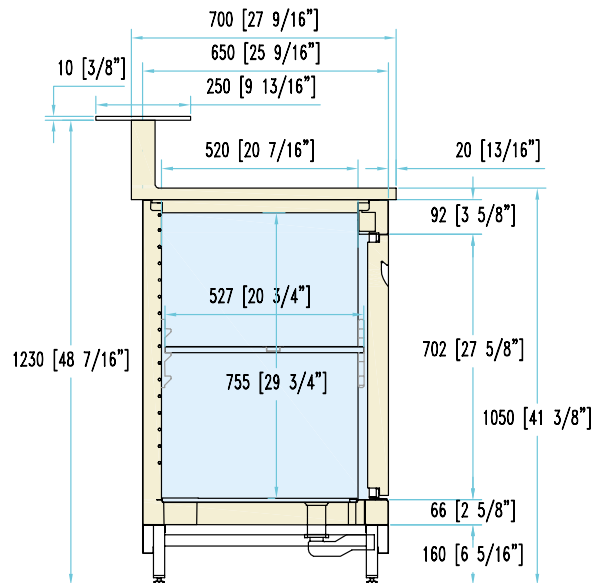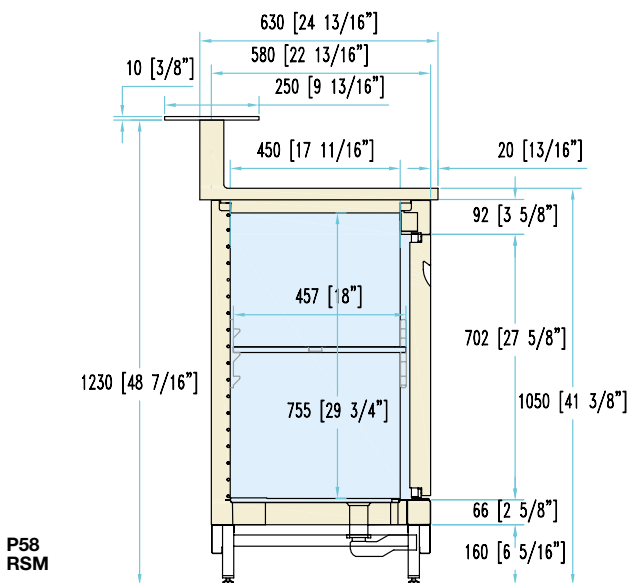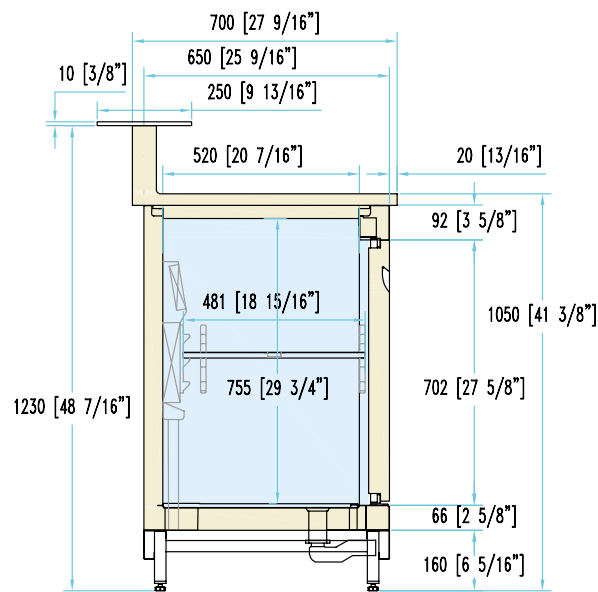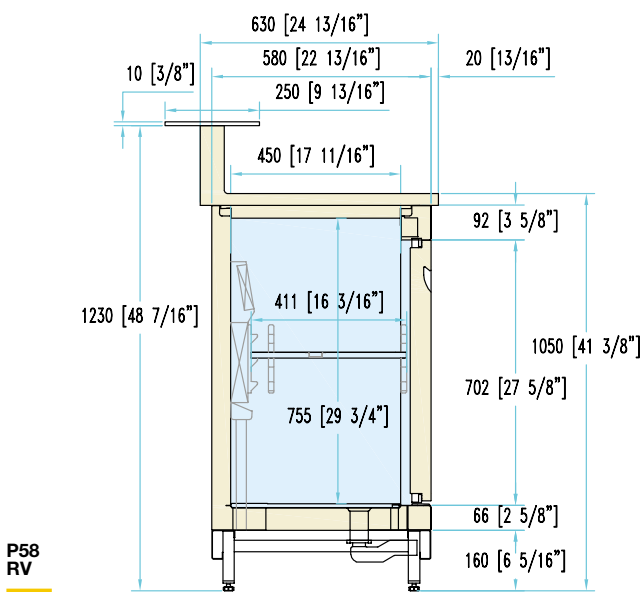



With S/S side and back panels on neutral sections

			mm	Inch
	SCARICO	DRAIN PIPE	Ø40-Ø20	Ø1.5"-Ø3/4"
	ALLACCIAMENTO GAS	REFRIGERANT PIPING	Ø8-Ø6	

TB freezer counters

without worktop

H 102
P 58-65
 • RSM

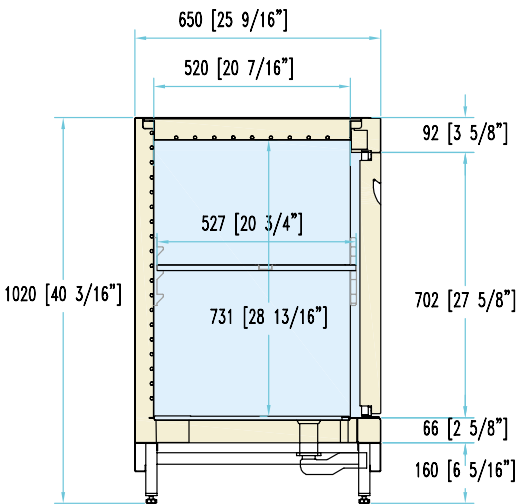
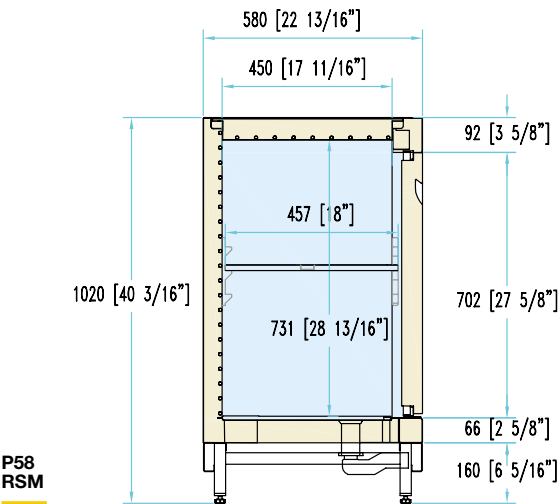


			mm	Inch
	SCARICO	DRAIN PIPE	Ø40-Ø20	Ø1.5"-Ø3/4"
	ALLACCIAMENTO GAS	REFRIGERANT PIPING	Ø8-Ø6	

TB freezer counters

with worktop
without backsplash riser

H 105
P 58-65
• RSM

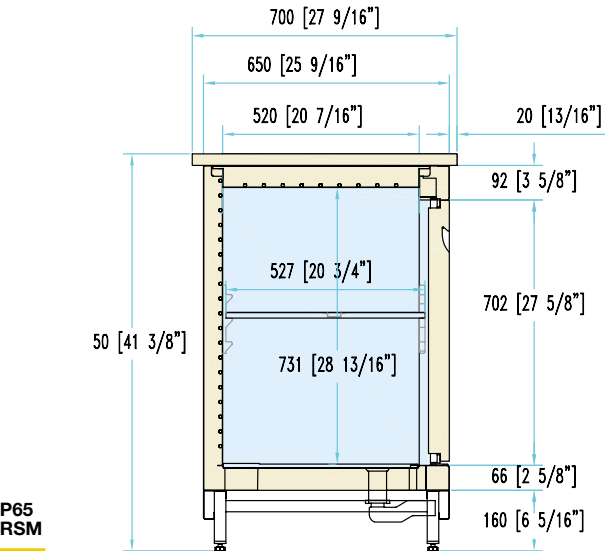
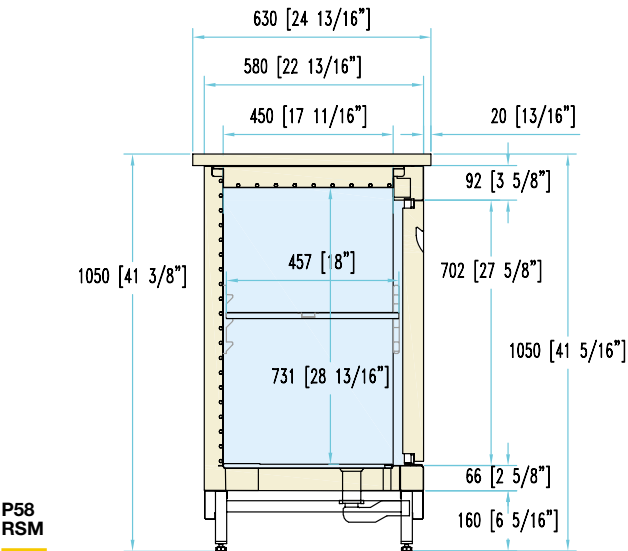


			mm	Inch
	SCARICO	DRAIN PIPE	Ø40-Ø20	Ø1.5"-Ø3/4"
	ALLACCIAMENTO GAS	REFRIGERANT PIPING	Ø8-Ø6	

TB freezer counters

with worktop
with backsplash riser
and countertop support

H 124
P 58-65
• RSM

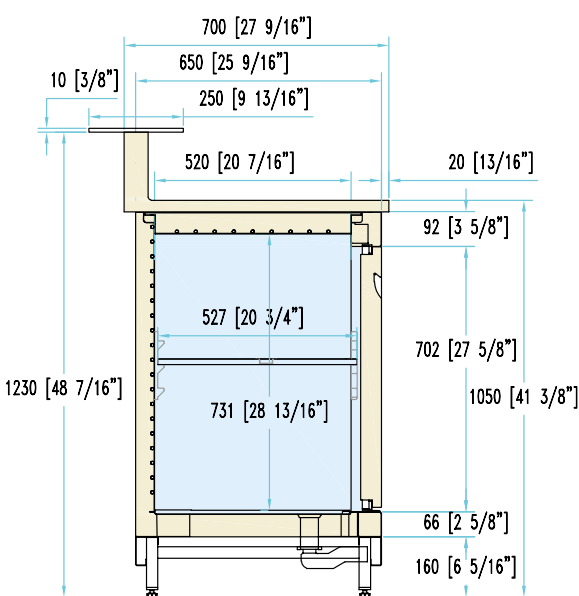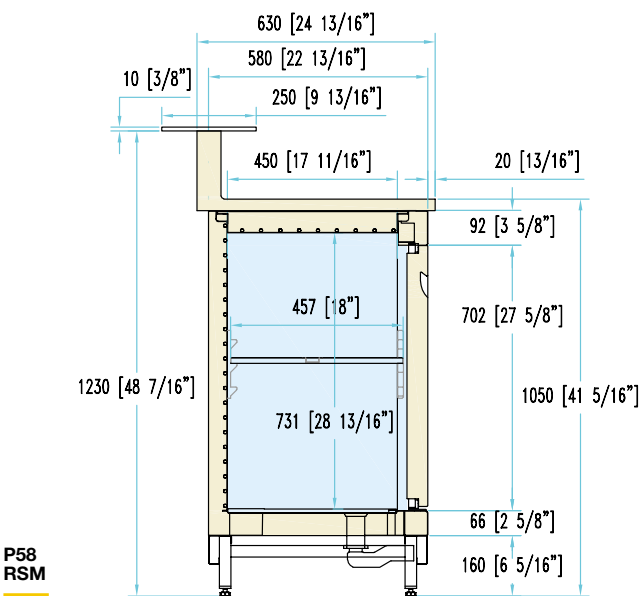

			mm	Inch
	SCARICO	DRAIN PIPE	Ø40-Ø20	Ø1.5"-Ø3/4"
	ALLACCIAMENTO GAS	REFRIGERANT PIPING	Ø8-Ø6	

TECHNICAL DATA

TN refrigerated bar counters

UCB plug-in condensing unit

DOORS	1	2	3	4	5
Capacity [lt]	158	324	493	669	845
Weight [kg]	60	90	120	150	180
Climatic class	7				
Climate conditions	35°C/ 70% R.H.				
Working temperature [°C]	+2/+10				
Compressors [q.ty/ type]	1/ hermetic				
Defrost	Off-cycle				
Power Supply [V/hz]	230/50				

VENTILATED refrigeration

Heat extraction rate (Ørun) [W@-10]	377	482	482	724	724
R290					
Energy Class					
Rated absorbed power [W/A]	203/ 1,26	262/1,63	262/1,63	351/2,18	351/2,18
Absorbed power during defrost [W/A]	38/0,24	38/0,24	38/0,24	52/ 0,32	52/ 0,32
R404A/R452A					
Rated absorbed power [W/A]	229/ 1,42	331/2,06	331/2,06	482/2,99	482/2,99
Absorbed power during defrost [W/A]	38/0,24	38/0,24	38/0,24	52/ 0,32	52/ 0,32

STATIC refrigeration

Heat extraction rate (Ørun) [W@-10]	377	482	482	724	724
R290					
Rated absorbed power [W/A]	188/ 1,17	214/ 1,3	214/ 1,3	281/ 1,75	281/ 1,75
Absorbed power during defrost [W/A]	10/ 0,06	10/ 0,06	10/ 0,06	10/ 0,06	10/ 0,06
R404A/R452A					
Rated absorbed power [W/A]	206/ 1,28	268/1,66	268/1,66	378/ 2,35	378/ 2,35
Absorbed power during defrost [W/A]	10/ 0,06	10/ 0,06	10/ 0,06	10/ 0,06	10/ 0,06

UCR remote condensing unit

DOORS	1	2	3	4	5
Refrigerants	R404A/ R452A				
Climatic class	7				
Climate conditions	35°C/ 70% R.H.				
Defrost	Off-cycle				
Power Supply [V/hz]	230/50				
Absorbed power of ventilated units [W/A]	38/0,24	38/0,24	38/0,24	52/ 0,32	52/ 0,32
Absorbed power of static units [W/A]	10/ 0,06	10/ 0,06	10/ 0,06	10/ 0,06	10/ 0,06
Absorbed power of remote condensing unit [W]	328	328	486	486	760
Condensing unit weight [kg]	16	16	16	16	20
Condensing unit dimensions LxDdeexH[mm]	450x300x270h	450x300x270h	480x330x295	480x330x295	500x330x297
Refrigerant piping diameter: Liquid/Suction 0-15mt	12/8	12/8	12/8	12/8	12/8
Refrigerant piping diameter : Liquid/Suction 16-30mt	14/8	14/8	14/8	14/8	14/8

TB freezer counters

UCB plug-in condensing unit

DOORS	1	2	3
Capacity [lt]	158	324	493
Weight [kg]	60	90	120
Climatic class	7		
Climate conditions	35°C/ 70% R.H.		
Working temperature [°C]	-18/-20		
Compressors [q.ty/ type]	1/ hermetic		
Defrost	Manual		
Power Supply [V/hz]	230/50		

STATIC

Heat extraction rate (Ørun) [W@-40]	258	258	270
R290			
Rated absorbed power [W/A]	262/1,6	394/2,5	430/2,7
Absorbed power during defrost [W/A]	46/0,22	81/0,4	117/0,6

UCR remote condensing unit

DOORS	1	2	3
Refrigerant	R404A/ R452A		
Climatic class	7		
Climate conditions	35°C/ 70% R.H.		
Working temperature [°C]	-18/-20		
Defrost	Manuale		
Power Supply [V/hz]	230/50		
Absorbed power [W/A]	46/0,22	81/0,4	117/0,6
Absorbed power of remote condensing unit [W]	593	593	832
Condensing unit weight [kg]	17	17	17
Condensing unit dimensions LxDdeexH[mm]	500X330X295	500X330X295	490X700X330
Refrigerant piping diameter: Liquid/Suction 0-15mt	14/8	14/8	14/8
Refrigerant piping diameter : Liquid/Suction 16-30mt	14/8	14/8	14/8

**Cross sections
and data sheets**

BACK BAR AND NEUTRAL BACK BAR COUNTERS




ABACO®

Neutral back bar counters

open storage
without worktop

H 93

P 40-58-65

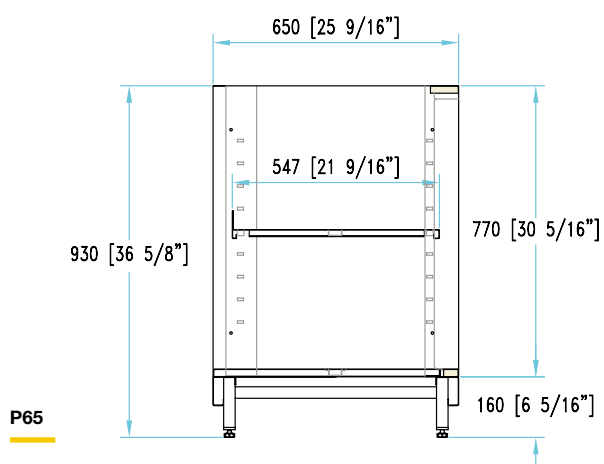
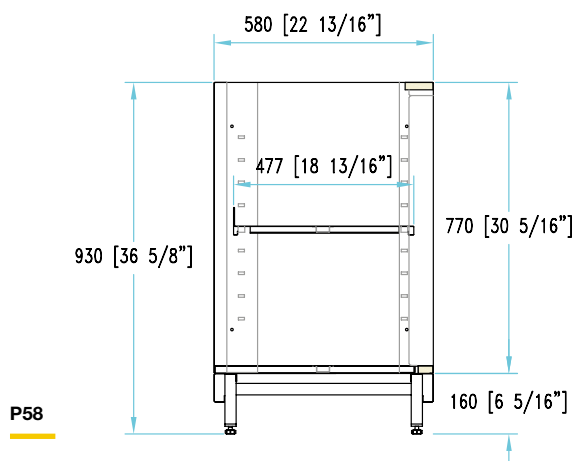
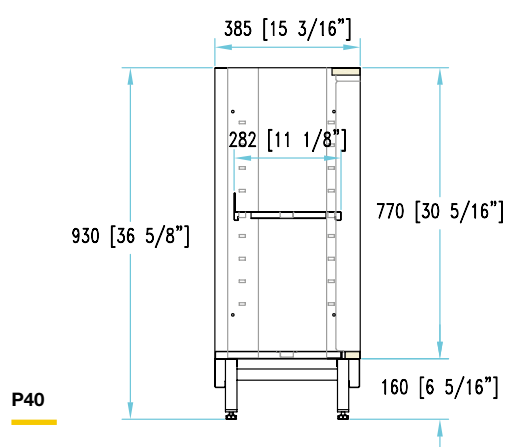


Neutral back bar counters

with hinged doors
without worktop

H 93

P 40-58-65

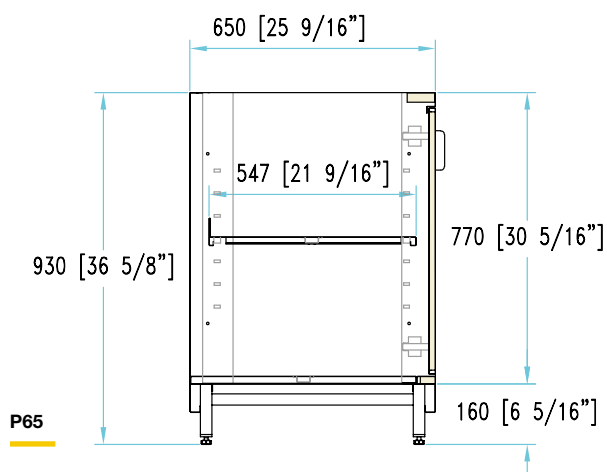
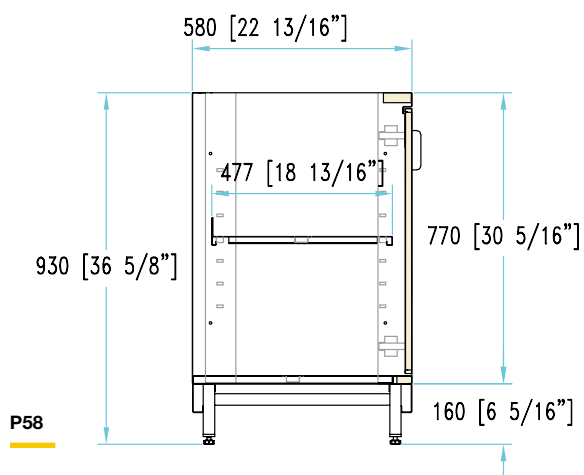
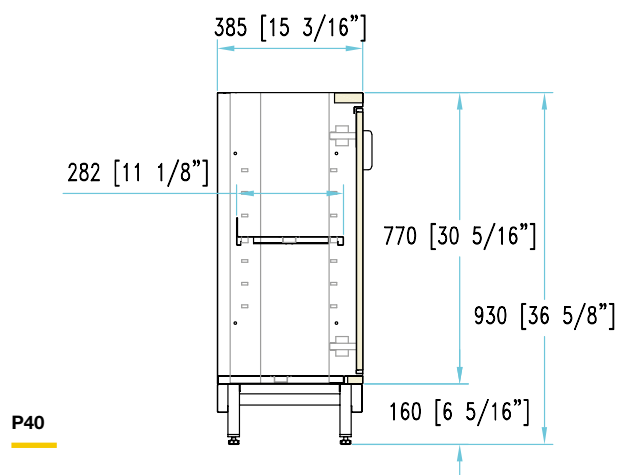


Neutral back bar counters

with sliding doors
without worktop

H 93




P 40-58-65

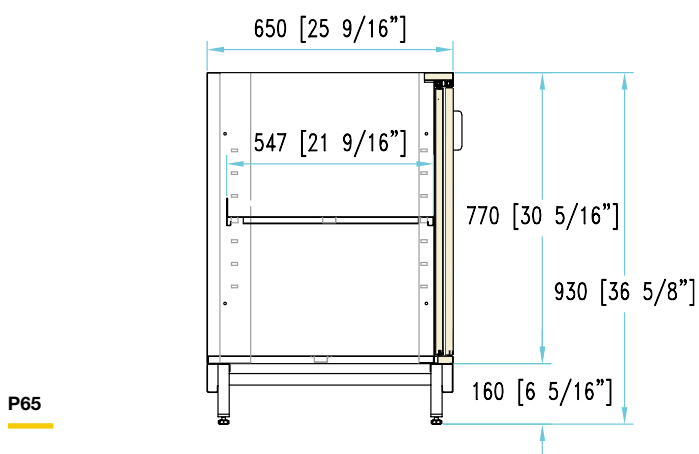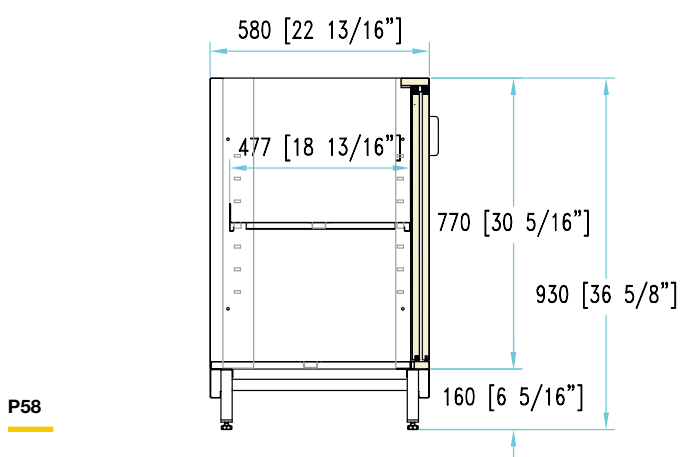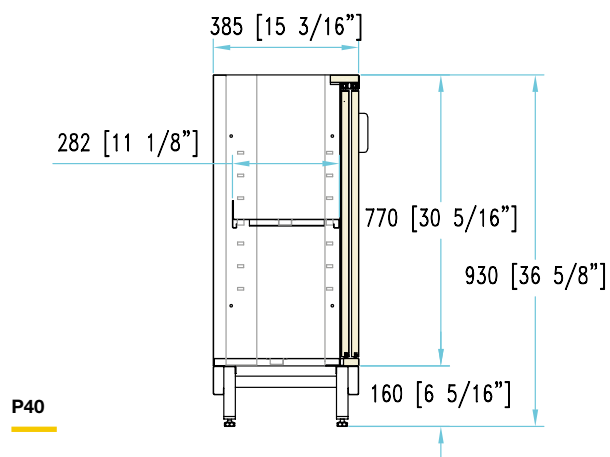

Neutral back bar counters

with hinged doors
without worktop




H 102
P 40-58-65

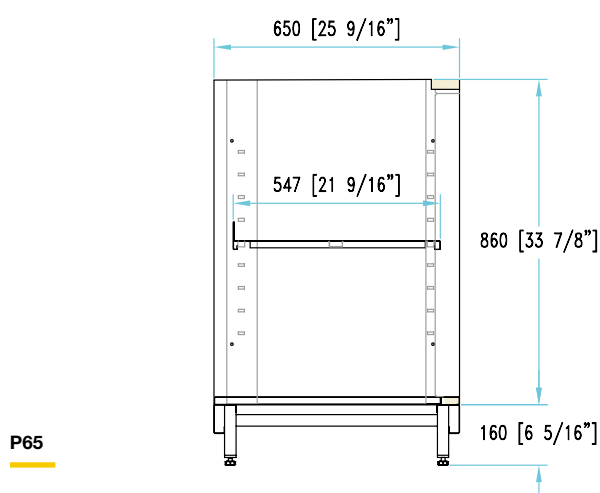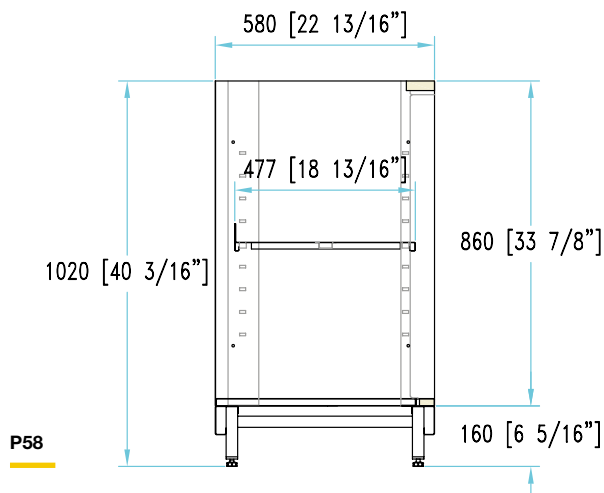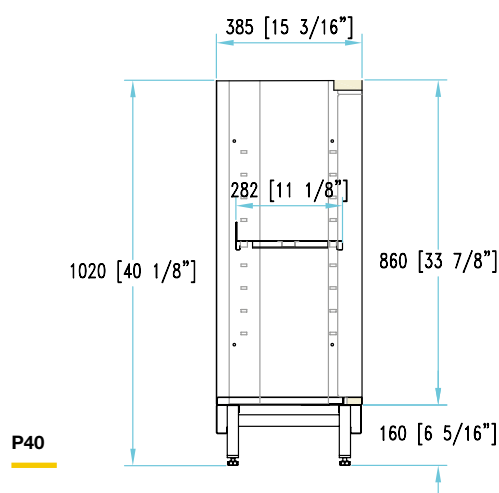

Neutral back bar counters

with hinged doors
without worktop




H 102
P 40-58-65

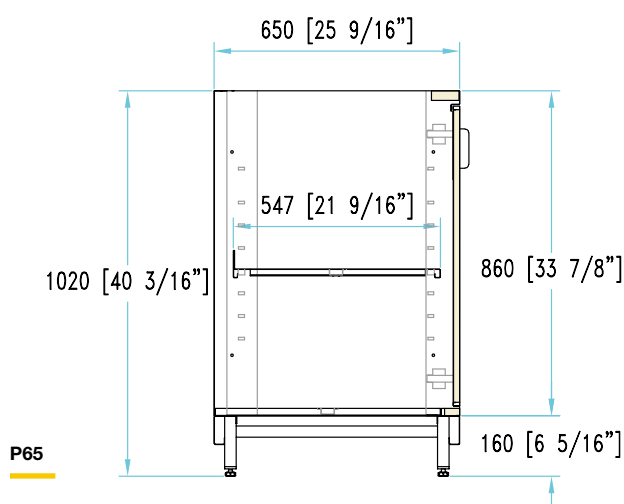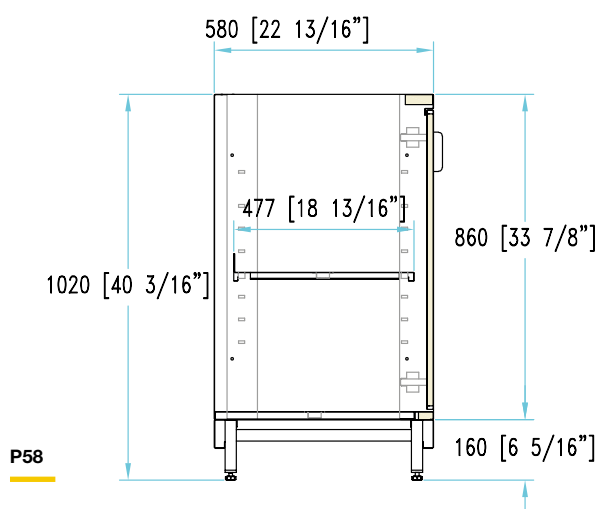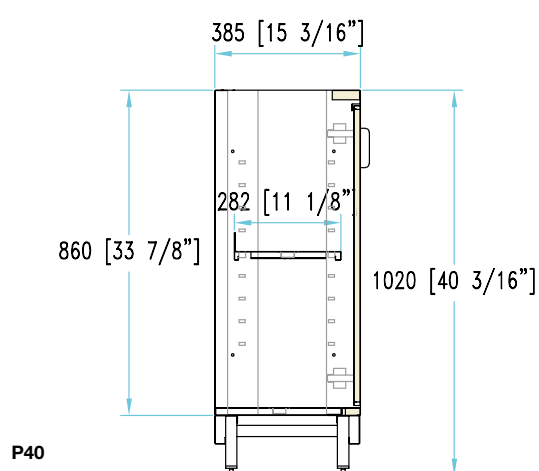

Neutral back bar counters





with sliding doors
without worktop

H 102
P 40-58-65

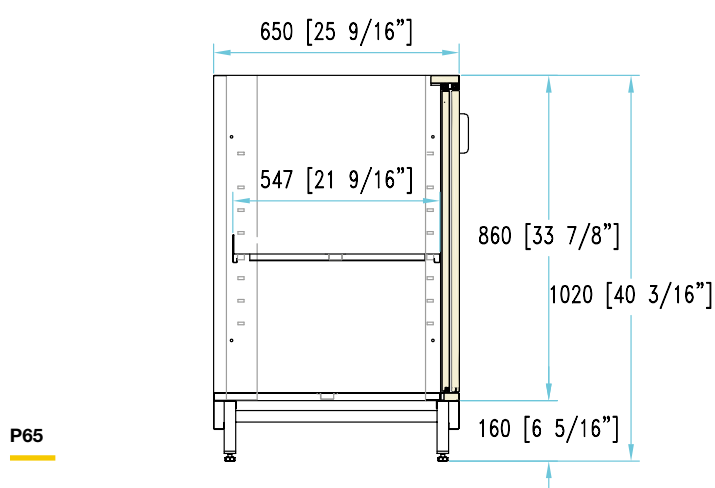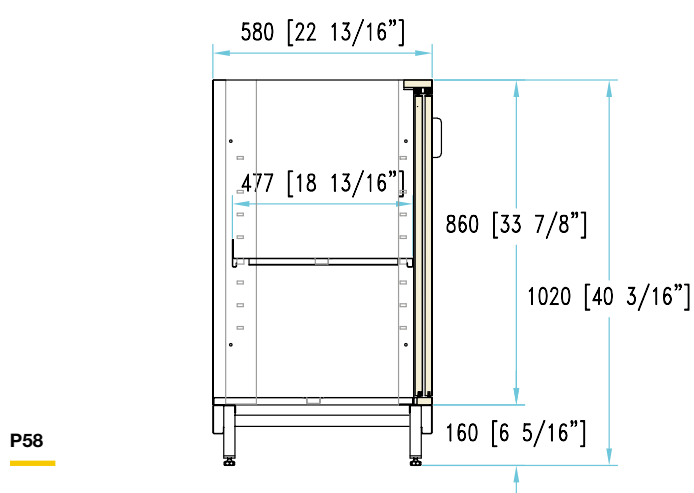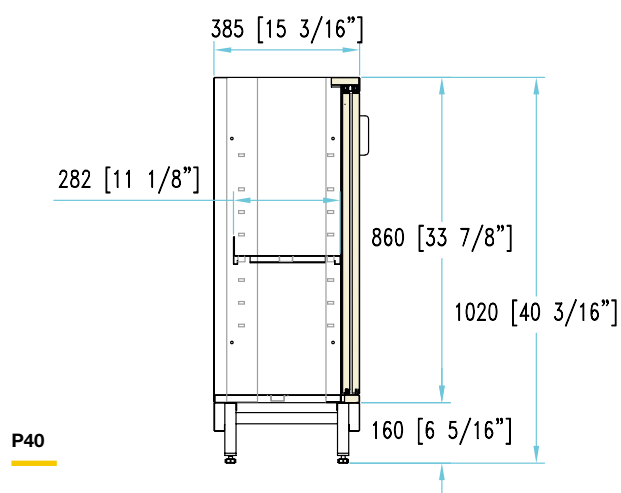

TN refrigerated back bar counters without worktop





H 93
P 58-65
 • RV-RSM

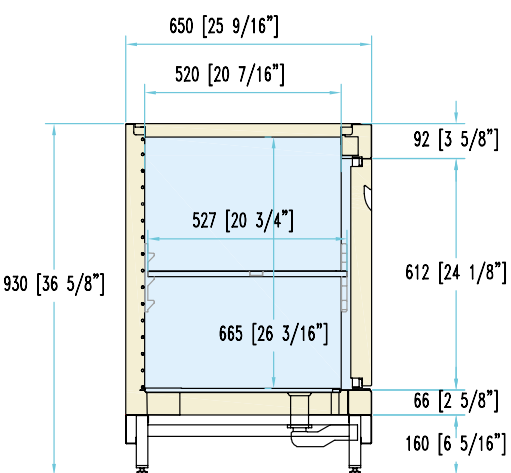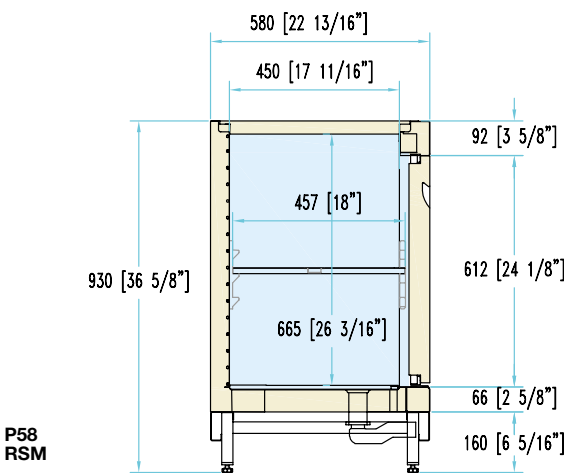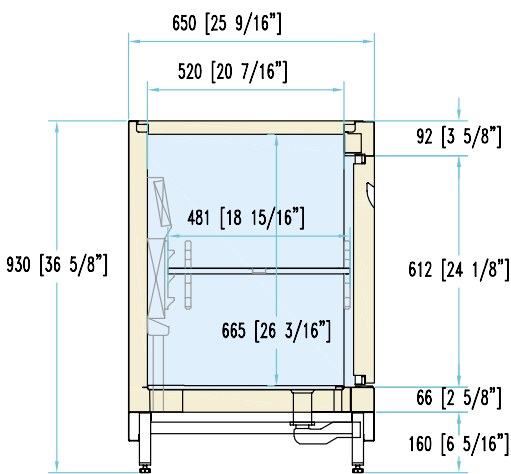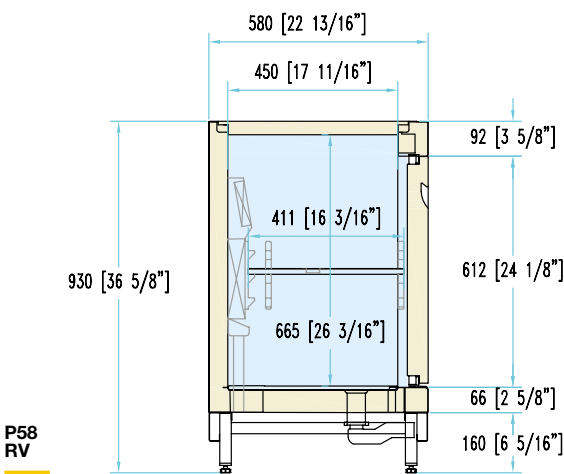

			mm	Inch
	SCARICO	DRAIN PIPE	Ø40-Ø20	Ø1.5"-Ø3/4"
	ALLACCIAMENTO GAS	REFRIGERANT PIPING	Ø8-Ø6	

TN refrigerated back bar counters without worktop

H 102
P 58-65
• RV-RSM

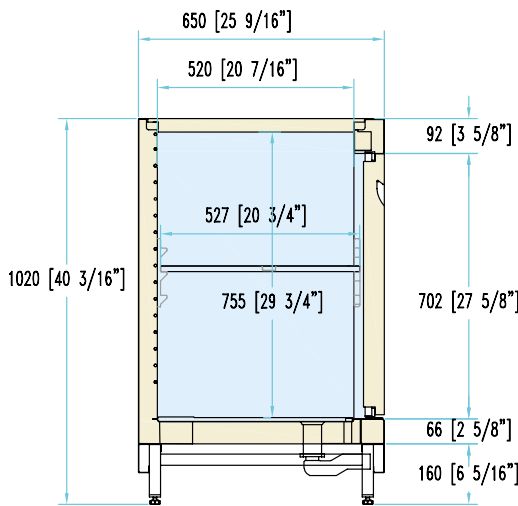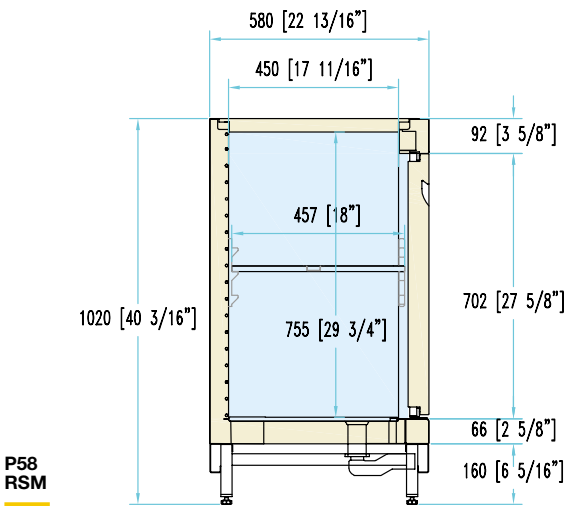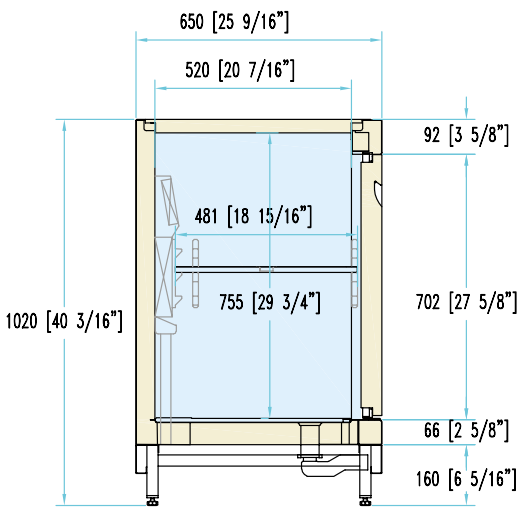
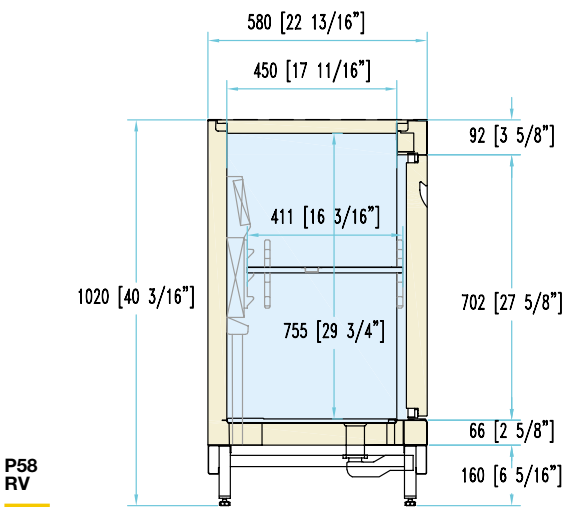


			mm	Inch
	SCARICO	DRAIN PIPE	Ø40-Ø20	Ø1.5"-Ø3/4"
	ALLACCIAMENTO GAS	REFRIGERANT PIPING	Ø8-Ø6	

TB freezer back bar counters

without worktop

H 93
P 58-65
 • RSM

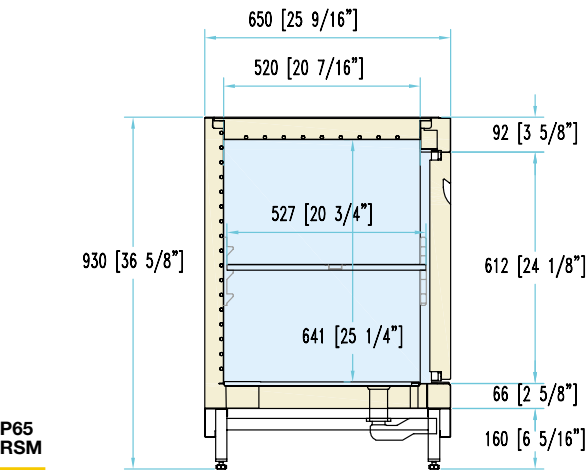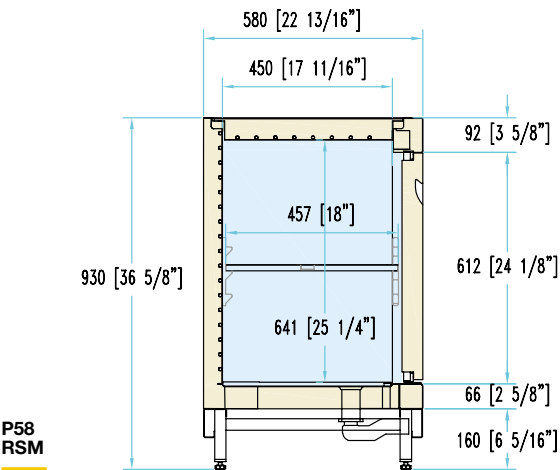


			mm	Inch
	SCARICO	DRAIN PIPE	Ø40-Ø20	Ø1.5"-Ø3/4"
	ALLACCIAMENTO GAS	REFRIGERANT PIPING	Ø8-Ø6	


TB freezer back bar counters

without worktop

H 102
P 58-65
• RSM

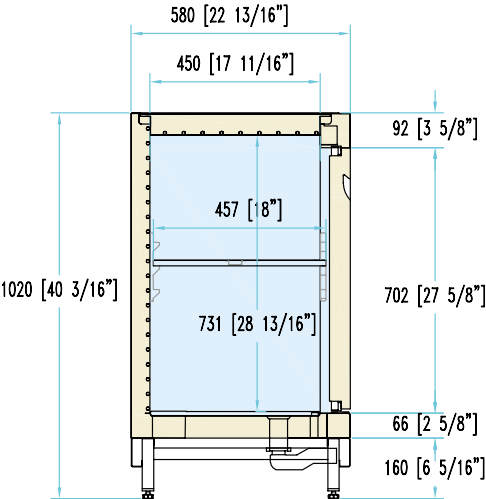

P58
RSM

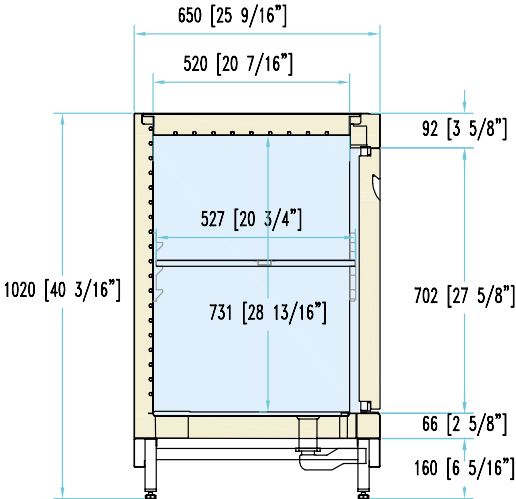

P65
RSM

			mm	Inch
	SCARICO	DRAIN PIPE	Ø40-Ø20	Ø1.5"-Ø3/4"
	ALLACCIAMENTO GAS	REFRIGERANT PIPING	Ø8-Ø6	

TECHNICAL DATA

TN refrigerated back bar counters

UCB plug-in condensing unit

DOORS	1	2	3	4	5
Capacity [lt]	158	324	493	669	845
Weight [kg]	60	90	120	150	180
Climatic class	7				
Climate conditions	35°C/ 70% R.H.				
Working temperature [°C]	+2/+10				
Compressors [q.ty/ type]	1/ hermetic				
Defrost	compressor off-cycle				
Power Supply [V/hz]	230/50				

VENTILATED refrigeration

Heat extraction rate (Ørun) [W@-10]	377	482	482	724	724
-------------------------------------	-----	-----	-----	-----	-----

R290

Energy class					
Rated absorbed power [W/A]	203/ 1,26	262/1,63	262/1,63	351/2,18	351/2,18
Absorbed power during defrost [W/A]	38/0,24	38/0,24	38/0,24	52/ 0,32	52/ 0,32

R404A/R452A

Rated absorbed power [W/A]	229/ 1,42	331/2,06	331/2,06	482/2,99	482/2,99
Absorbed power during defrost [W/A]	38/0,24	38/0,24	38/0,24	52/ 0,32	52/ 0,32

STATIC refrigeration

Heat extraction rate (Ørun) [W@-10]	377	482	482	724	724
-------------------------------------	-----	-----	-----	-----	-----

R290

Rated absorbed power [W/A]	188/ 1,17	214/ 1,3	214/ 1,3	281/ 1,75	281/ 1,75
Absorbed power during defrost [W/A]	10/ 0,06	10/ 0,06	10/ 0,06	10/ 0,06	10/ 0,06

R404A/R452A

Rated absorbed power [W/A]	206/ 1,28	268/1,66	268/1,66	378/ 2,35	378/ 2,35
Absorbed power during defrost [W/A]	10/ 0,06	10/ 0,06	10/ 0,06	10/ 0,06	10/ 0,06

UCR remote condensing unit

DOORS	1	2	3	4	5
Refrigerants	R404A/ R452A				
Climatic class	7				
Climate conditions	35°C/ 70% R.H.				
Defrost	compressor off-cycle				
Power Supply [V/hz]	230/50				
Absorbed power of ventilated units [W/A]	38/0,24	38/0,24	38/0,24	52/ 0,32	52/ 0,32
Absorbed power of static units [W/A]	10/ 0,06	10/ 0,06	10/ 0,06	10/ 0,06	10/ 0,06
Absorbed power of remote condensing unit [W]	328	328	486	486	760
Condensing unit weight [kg]	16	16	16	16	20
Condensing unit dimensions LxDxH[mm]	450x300x270h	450x300x270h	480x330x295	480x330x295	500x330x297
Refrigerant piping diameter: Liquid/Suction 0-15mt	12/8	12/8	12/8	12/8	12/8
Refrigerant piping diameter : Liquid/Suction 16-30mt	14/8	14/8	14/8	14/8	14/8

TB freezer back bar counters

UCB plug-in condensing unit

DOORS	1	2	3
Capacity [lt]	158	324	493
Weight [kg]	60	90	120
Climatic class	7		
Climate conditions	35°C/ 70% R.H.		
Working temperature [°C]	-18/-20		
Compressors [q.ty/ type]	1/ hermetic		
Defrost	Manual		
Power Supply [V/hz]	230/50		
STATIC refrigeration			
Heat extraction rate (Qrun) [W@-40]	258	258	270
R290			
Rated absorbed power [W/A]	262/1,6	394/2,5	430/2,7
Absorbed power during defrost [W/A]	46/0.22	81/0.4	117/0.6

UCR remote condensing unit

DOORS	1	2	3
Refrigerants	R404A/ R452A		
Climatic class	7		
Climate conditions	35°C/ 70% R.H.		
Working temperature [°C]	-18/-20		
Defrost	Manual		
Power Supply [V/hz]	230/50		
Absorbed power [W/A]	46/0,22	81/0,4	117/0,6
Absorbed power of remote condensing unit [W]	593	593	832
Condensing unit weight [kg]	17	17	17
Condensing unit dimensions LxDxH[mm]	500X330X295	500X330X295	490X700X330
Refrigerant piping diameter: Liquid/Suction 0-15mt	14/8	14/8	14/8
Refrigerant piping diameter : Liquid/Suction 16-30mt	14/8	14/8	14/8

