


Multycool



ISA S.p.A.

www.isaitaly.com

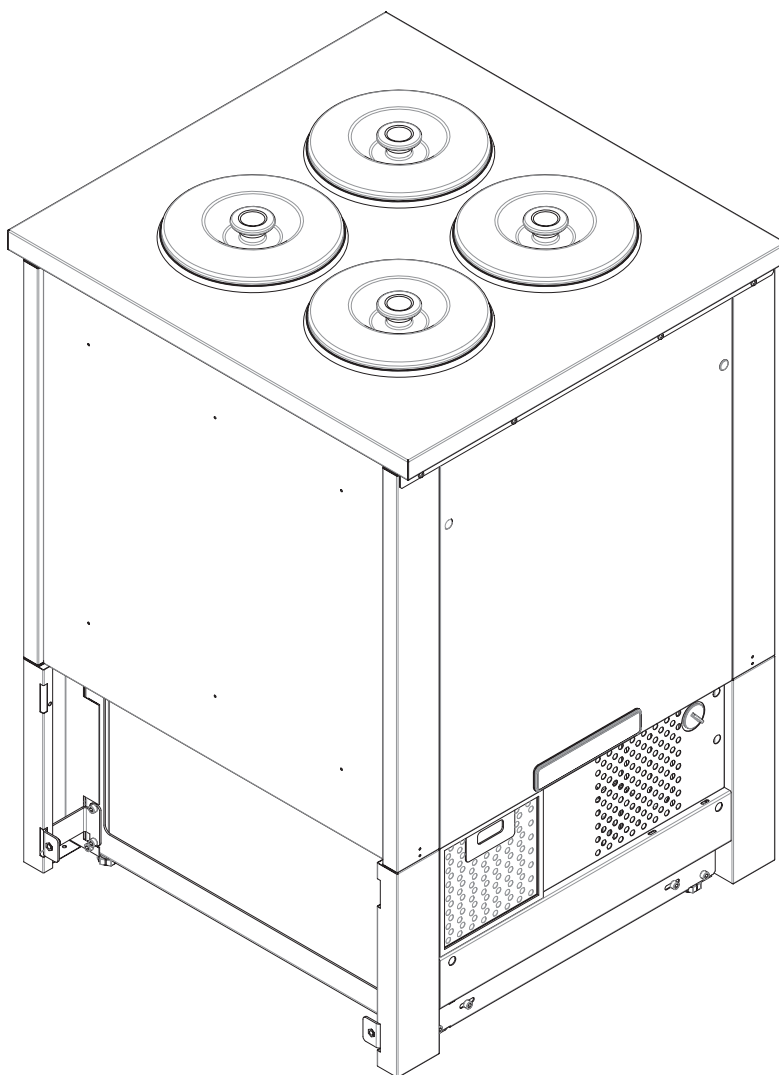

1.	NOTES / WARNINGS	4
1.1	REFRIGERANT	7
2.	MANUFACTURER	8
3.	WARRANTY TERMS AND CONDITIONS	8
4.	IDENTIFYING THE EQUIPMENT	9
5.	SAFETY	10
6.	RESIDUAL RISKS	11
7.	DISPOSAL OF WASTE MATERIAL	12
8.	MAINTENANCE	13
9.	FAULTS - TECHNICAL ASSISTANCE - USER	14
10.	TECHNICAL ASSISTANCE	15
11.	STORAGE	15
12.	PROLONGED APPLIANCE SWITCH-OFF	15
13.	INSTALLATION	16
13.1	UNPACKING	16
13.2	ENVIRONMENTAL CONDITIONS	17
13.3	ELECTRICAL CONNECTION	17
13.4	POSITIONING ON THE WALL	17
13.5	POSITIONING / INSTALLATION	18
14.	COMPOSITION	19
15.	USE	19
16.	TECHNICAL SPECIFICATIONS	20
17.	CONTROL PANEL	24
17.1	USER INTERFACE - XW40LSH	25
18.	CLEANING	28
18.1	INTERNAL (GENERAL)	28
18.2	CONDENSING UNIT	29
18.3	DEFROST WATER COLLECTION TRAY (IF PRESENT)	30

The manual contains symbols to attract the reader's attention and highlight particularly important aspects. The table below illustrates the meaning of the various symbols used.

	Attention / hazard		Important information
	Earthing		Operations that must be performed by two people
	High temperature hot surfaces		Information
	Danger: Live electrical parts		Use of protective clothing
	Danger: Slipping		Visual observation
	Danger: Tripping		Notes / warnings
	Danger: Flammable material		Waste disposal
	Danger: Fire		Recyclable materials
	Danger: Fire		Sound pressure level
	Danger: Explosion		
	Read the manual		
	Requests for maintenance or operations must be carried out by qualified staff or technical after-sales centres		

1. NOTES / WARNINGS



NOTE

The contents of this manual are of a technical nature and are the property of **ISA**. It is forbidden to reproduce, disclose or modify all or part of the contents without written consent. Any infringement will be legally pursued.

The manual and the conformity certificate are an integral part of the equipment and should always accompany the product in the event of a transfer to a new location or to a new owner. The user is responsible for the integrity of these documents, for their consultation and during the whole life cycle of the equipment itself. Keep this manual in a safe place. It should be available for consultation near the equipment at all times. If lost or destroyed, you can request a copy of the manual from **ISA** by specifying the exact model, serial number and year of manufacture. The manual reflects the manufacturing technology at the time of supply. The manufacturer reserves the right to modify its products in any way it deems necessary, with no obligation to update manuals and machines relating to previous manufacturing batches.

The equipment can be used by children no younger than 8 and by persons with reduced physical, sensory or mental capabilities, or lacking experience or necessary knowledge, as long as supervised or after having received training regarding safe use of the equipment and have an understanding of the inherent risks involved. Children must not play with the appliance. The cleaning and maintenance that the user will carry out must not be undertaken by children without supervision.

Always refer to this manual before going ahead with any operation. Before doing any type of work, disconnect the equipment from the power supply. Any work on electric and electronic parts or cooling system components should only be carried out by trained personnel in compliance with current laws.

The Manufacturer cannot be held liable for any damage to persons, animals or to the product in the following cases:

- Improper use of the equipment or use by unqualified or unauthorised personnel.
- Failure to comply with current legislation.
- Incorrect installation and/or power supply faults.
- Failure to observe the instructions contained in this Manual.
- Failure to follow the maintenance schedule.
- Unauthorised modifications.
- installation of non-original spare parts in the equipment.
- Installation and use of the equipment for purposes other than those for which the appliance was designed and sold.
- Tampering with or damage to the power supply cable.

Liability for applying the safety instructions contained in this manual is held by the technical personnel responsible for the intended use of the equipment, who should ensure that authorised personnel:

- Are qualified to carry out the requested activity.
- Are aware of and carefully comply with the instructions contained in this document.
- Are aware of, and apply, the general safety standards applicable to the equipment.

WARNING Keep any required ventilation openings clear of obstruction.

WARNING Servicing shall be performed only as recommended by the manufacturer.

WARNING The actual change of refrigerant must conform to the size of the room in which the refrigerant-containing parts are installed. If an indirect refrigeration circuit is used, the secondary circuit must be checked for the presence of refrigerant. The risk is contamination between different refrigerants, to which special attention should be paid.

TRANSLATION OF THE ORIGINAL INSTRUCTIONS

The buyer is responsible for training personnel using the appliance on the risks, safety devices and general health and safety rules required by the laws of the country where the appliance is installed. Users/operators must be aware of the position of all the controls and how they work, as well as of the features of the appliance. They should also read this manual in its entirety. Maintenance work should be conducted by qualified personnel after the appliance has been prepared adequately.

**DANGER**

Unauthorised tampering or replacement of one or more parts of the appliance, use of accessories that modify the use of the same and use of spare parts different to those recommended, can become the cause of injury.

**DANGER**

Any work conducted on the appliance must involve disconnection from the power socket and in any case, none of the protective elements (grid, casing) should be removed by non-qualified staff. The appliance should not be operated when these protective elements have been removed. Before carrying out any cleaning, maintenance or replacement operation, disconnect the equipment from the mains by unplugging it from the electrical socket. During these operations the operator must be able to ensure that the plug remains disconnected.

**NOTE**

In order to avoid compromising the functionality and safety of the appliance, particularly complex installation and maintenance activities are not documented in this manual and must be performed by the undersigned company.

WARNING Never use electrical appliances inside this appliance.

WARNING Do not use mechanical devices or other means to accelerate the defrosting process, other than those recommended by the manufacturer.

WARNING Keep ventilation openings in the appliance's casing or in the recess free from obstruction.

WARNING Do not damage the refrigeration circuit.

WARNING The installation and operating instructions for appliances that use a flammable refrigerant shall indicate that component parts shall be replaced with like components so as to minimize the risk of possible ignition due to incorrect parts.



The A-weighted emission sound pressure level is lower than 70 dB(A).

**RISK OF EXPLOSION**

Do not store products containing combustible gaseous propellants and explosive substances in the equipment.

ISA uses materials of the best quality and as they enter the company, we constantly monitor their storage the use as part of the manufacturing process to prevent damage, deterioration and failure. All manufacturing elements have been designed and manufactured in order to guarantee high safety and reliability standards. All appliances are subjected to a strict testing procedure before delivery. However, please bear in mind that product performance over time depends on correct use and adequate maintenance. This manual contains the necessary instructions to maintain the appliance's initial appearance and functions over time. The use and maintenance manual contains the information required to understand the operating modes of the appliance and for its correct use, in particular: the technical description of the various functional units, accessories and safety systems, operation, use of instrumentation and interpretation of any diagnostic warnings, main procedures and information relating to the ordinary maintenance operations.

For correct use of the appliance, the working environment should comply with current health and safety standards.

The safety requirements, indications, standards and notes illustrated in the various chapters of the manual are aimed at establishing a code of conduct and a series of obligations to be observed when performing the various activities, in order to create safe conditions for personnel, the equipment and the surrounding environment.

The safety standards reported in this document are intended for trained, authorised personnel responsible for:

- Transport
- Installation
- Operation
- Management
- Maintenance
- Cleaning
- Decommissioning
- Disposal



ATTENTION

Reading this manual, albeit in full, is no substitute for adequate user experience. therefore it should only be considered as a useful reminder of the technical features and the main operations to perform.



WARNING

The installers and users must read and understand the instructions contained herein before performing any operation on the appliance.

STAFF TRAINING

The buyer is responsible for ensuring personnel who will use the appliance and maintenance technical staff are instructed and trained adequately. The manufacturer is available for advice, clarifications, etc. so that the operator and technical staff can use the appliance correctly. To ensure operator safety, appliance devices should be kept in constant working order. This manual is intended to illustrate the use and maintenance of the appliance. The operator has a responsibility and duty to carefully observe the instructions contained within it.

Failure to comply with safety standards may result in injury to personnel and damage to the equipment components and control unit. The user can contact the dealer to request additional information not contained in this document, or suggest improvements, at any time.



Before delivery to the customer, specialist technicians must check that the equipment is working properly to ensure that optimum performance is obtained.

WARNING

Do not use means to accelerate the defrosting process or to clean, other than those recommended by the manufacturer.

The appliance shall be stored in a room without continuously operating ignition sources, an operating gas appliance or an operating electric heater.

Do not pierce or burn.

Be aware that refrigerants may not contain an odour.



A3

TRANSLATION OF THE ORIGINAL INSTRUCTIONS

R290

The refrigerant is an environmentally compatible but **flammable gas**.
When transporting, installing and scrapping the equipment, exercise extreme caution **so as not to damage the refrigerant circuit pipes**.

IN THE EVENT OF DAMAGE:

Remove the power plug.
Keep equipment away from flames or sources of ignition.
Properly ventilate the premises for a few minutes.

INFORM CUSTOMER SERVICE.


The more refrigerant the appliance contains, the bigger the room in which the appliance is located must be.
In areas too small, in the event of leakage can form a flammable mixture of air and gas.

REFRIGERANT CHARGES:

≤ 150 grams The surface area of the room where the equipment is located must be at least 7 m^2 .

The surface area of the room where the equipment is located must be at least $A=12 \text{ m}^2$.

≥ 150 grams



ATTENTION:

Maintenance must be carried out by trained technical personnel authorised to work on flammable refrigerants.

2. MANUFACTURER

ISA S.p.A.

Via Madonna di Campagna 123

06083 Bastia Umbra - PG - Italy

T. +39 075 801 71

E. customerserviceisaitaly.com

3. WARRANTY TERMS AND CONDITIONS

The seller guarantees their equipment for a period of 12 (twelve) months from delivery.

The warranty includes repairs or replacements of any faulty parts due to manufacturing processes or installation after written communication has been received, stating the appliance serial number and date of installation.

Not included in the warranty:

- Incorrect use of the appliance.
- Incorrect connection to the power grid.
- Normal wear of the components (such as breakage of the compressors, of the neon/LED lights, etc.) if not due to manufacturing defects.
- Calls for installation, technical instructions, adjustments, condenser cleaning.

If the seller's technical staff detect any tampering, unauthorised repairs or inappropriate use of appliance the warranty will be invalidated.

Shipment of components covered by the warranty is freight collect only.

Any damage to the appliance detected at the time of delivery due to transport must be reported on the same shipping note to claim compensation from the carrier.

The seller cannot be held liable in the event of damage to accepted products due to appliance faults.

4. IDENTIFYING THE EQUIPMENT

Find the label affixed on the machine to read the technical data.

Check the machine model and the power supply voltage before you perform any operation.

If discrepancies are found, contact the manufacturer or the company that offer the supply immediately.

Identification of the company responsible for the product		Conformity marking		
Type		Model		
Article				
Manufacturing Date	Production order	Customer order	Climate class (*)	
Serial number - Series number			Property number - Series number	
Power supply voltage  V~	Power supply frequency Hz	Fuse Value  A	Lamp Power  W	Electrical resistance absorption  W
Nominal power  W	Power in defrosting  W	Pressure (minimum) Bar	Pressure (maximum) Bar	Safety class (EN 60335-2-89)
Nominal current  W	Defrost current  W	Shelf load Kg/m²		Tank loading Kg/m²
Refrigerant type 	Refrigerant weight 1. g 2. g 3. g	Gross volume L		
		Blowing agent		
It contains fluorinated greenhouse gases governed by the Kyoto protocol; hermetically sealed system.				

TEST CLIMATE CLASSES (*)	 °C	 % RH	 °C	 % RH
A	16	80	30	55
B	16	80	35	75
C	16	80	40	40
CC1	25	60	-	-
CC2	32.2	65	-	-
CC3	40.6	75	-	-
SN	10	-	32	-
N	16	-	32	-
ST	16	-	38	-
T	16	-	43	-
0	16	80	20	50
1	16	80	16	80
2	16	80	22	65
3	16	80	25	60
4	16	80	30	55
5	16	80	40	40
6	16	80	27	70
7	16	80	35	75
8	16	80	24	55

5. SAFETY

The appliance is equipped with safety devices. The buyer is responsible for training personnel using the appliance on the risks, safety devices and general health and safety rules required by the laws of the country where the appliance is installed. Users/operators must be aware of the position and operation of all the controls and features of the equipment and must also have read this manual in full.

SAFETY DEVICES INSTALLED

Devices whose operation prevents the occurrence of risk situations in operating conditions (e.g. fuses, pressure switches, protections, magnet circuit breakers, etc.).

FIXED GUARDS

Fixed protective devices consist of fixed perimeter guards, which are used to prevent external parts from entering the equipment.



DANGER

It is prohibited to re-start the appliance following maintenance without having correctly restored the panels.



VISUAL OBSERVATION

Periodically check the integrity of the fixed guards and the relative fixings to the structure with particular attention to the protection panels.

ISOLATING THE ELECTRIC POWER SUPPLY

Before performing any maintenance work on the equipment or on its parts, disconnect the relevant power supply.



DANGER

In the event of maintenance operations where the operator cannot prevent accidental closure of the circuit by others, completely disconnect the appliance from the mains electricity.

CIRCUIT FAULTS

Owing to potential faults, safety circuits may become less effective, which results in lower safety levels. You should check the operational condition of the appliance devices regularly.

WARNING SIGNS (IF ANY)

The equipment is fitted with danger, attention and obligation warning plates defined in accordance with the legislation on graphic symbols to be used on systems. The plates are located where they are clearly visible.



ATTENTION

Any warning plates on the appliance must not be removed.

The user is responsible for replacing warning signs that, owing to wear, become unreadable.

FALLING OBJECTS

Positioning of the cabinet display parts (where present) of the equipment (i.e. counters, rods and hooks, etc.), as well as the arrangement of the products inside the cabinet can be the source of potential hazards if not properly performed. Follow the positioning instructions described in this Manual before you place products inside the cabinet, check that the counters are properly fastened, as also the hooks, etc. Do not exceed the maximum load limit. Do not position tilted product on the counters if they are not held in place by their stoppers.

COOLING

During different operations to perform on the counter, such as cleaning or loading goods, it is necessary to handle products and/or counter parts at a low temperature with the risk of "cold injury" for the operators and/or accidental slipping hazard. Follow the safety regulations in the place where the cabinet is installed; more specifically, be sure to always use correct PPE (especially gloves).

FOOD SAFETY (PACKAGED PRODUCTS)

Direct contact between food products and the display surfaces does not occur when displaying packaged products, however, if product packaging is accidentally broken for a prolonged period of time, the product may become contaminated. If this occurs, strictly observe the instructions for use of the equipment (remove the damaged packaging from the display and clean with specific products).

6. RESIDUAL RISKS

During design the manufacturer examined all the areas or parts at risk. Therefore, all necessary precautions have been taken to prevent risks to persons and damage to the appliance.



ATTENTION

Periodically check that all safety devices are operating correctly.
Do not remove the fixed guards.
Do not introduce unauthorised objects or tools into the work area.

However, although the equipment features appropriate safety systems, there are still some risks that cannot be eliminated but can be reduced by the end user by taking corrective actions and using correct operating procedures. Below is a summary of the remaining risks associated with the appliance during:

- Normal operation.
- Adjustment and fine tuning.
- Maintenance.
- Cleaning.

RISK OF CONTACT WITH LIVE PARTS

Risk of breaking or damaging the electrical components of the appliance, with a possible reduction in safety levels following a short circuit.

Before connecting the electricity supply, make sure there is no ongoing maintenance work.



ATTENTION

Before carrying out the connection, check that the d.c. current in the installation point does not exceed the value indicated on the protections switches present in the electric control board. If this is not the case, the user must provide the relevant limiting devices.
It is strictly forbidden to conduct any electrical modification, in order to prevent additional unforeseen hazards and risks.

FIRE



DANGER

In the event of a fire, immediately disconnect the master switch from the main power supply line.

EXPLOSIVE ATMOSPHERE

The equipment must not be located in an area classified as an explosion risk according to 1999/92/EC such as:

Area:

- 0** An area in which there is a permanent, long-lasting or frequently explosive atmosphere made up of a mixture of air and flammable substances in the form of gases, fumes or steam.
- 1** An area in which the formation of an explosive atmosphere, made up of a mixture of air and flammable substances in the form of gases, fumes or steam is occasionally probable during normal activities.
- 20** An area in which there is a permanent, long-lasting or frequently explosive atmosphere in the form of clouds of combustible dust in the air.
- 21** An area in which occasionally during normal activities an explosive atmosphere is to be expected to form in the form of of combustible dust cloud in the air.

SLIPPING



DANGER

Any leaks in the areas surrounding the appliance may cause personnel to slip.
Check that there are no leaks and keep these areas clean at all times.

TRIPPING



DANGER

Generally untidy deposits of material may constitute a tripping hazard and a partial or total obstruction of emergency exit routes.
Ensure operational, transit and escape routes, free from obstacles, and comply with the current regulations.

7. DISPOSAL OF WASTE MATERIAL

During normal operation, the appliance does not generate any environmental contamination. At the end of its life cycle, or if it is necessary to proceed to permanent decommissioning, we recommend following the procedures below:

DISPOSAL

(USER)



The symbol, applied to either the product or its packaging, indicates that the product should not be considered as normal domestic waste, but should be taken to a waste collection point for the recycling of electrical and electronic appliances. The correct disposal of this product contributes to preventing potential negative consequences that might derive from an inadequate disposal of the product. For detailed information about recycling this product, contact your council, your local waste collection service or the store where you purchased the product.

PROCEDURE FOR DISPOSAL and RECYCLING AT THE END OF THE APPLIANCE'S SERVICE LIFE

(AUTHORISED BODIES)

- Switch off the equipment and unplug the power supply cable.
- Remove the lamps (if installed). These should be disposed of separately.
- Remove the power supply units and the electronic cards. These must be disposed of separately.
- Disassemble all the independent parts (grids, casings, profiles, etc.) and separate them by homogeneous material characteristics, in order to access the heat exchangers, pipes, cables, etc. being careful not to damage the refrigeration circuit.
- Remove all mobile parts (doors, sliding doors, glass parts, etc.) and group the various materials according to their similar characteristics.
- Check the type of refrigerant on the plate inside the counter; remove the refrigerant and dispose of it through the authorised services.
- Disconnect the evaporator, condenser, compressor, pipes and fans; the tubes being made of copper, aluminium, steel and plastic must be disposed of separately.
- After removing all the casings and the various components from the frame, separate the different types of material that compose them (plastic, sheet metal, polyurethane, copper, etc.) and group by homogeneous characteristics.



All recyclable materials and waste must be treated and recycled in a professional manner and in accordance with the directives of the country in question. The company assigned to recycling must be registered and certified as a waste disposal service according to the specific directives of the country in question.



ATTENTION

Illegal disposal of the product by the owner will result in the application of administrative sanctions provided by the laws in force. Disposal of the product should comply with current laws on the disposal of coolant liquids and mineral oils.



IMPORTANT

If the crossed-out wheeled bin symbol is not attached to the device, it means that the manufacturer is not responsible for disposal of the product; in this case, the current regulations on waste disposal always apply. Contact the competent municipal office, the local waste disposal service or the shop where the product was purchased.



ADDITIONAL INFORMATION

Further information on the disposal of liquid coolant, oils and other substances is available on the safety data sheet corresponding to the substance itself. In order to dispose of foamed assemblies, remember that the polyurethane foams used are CFC, HFC and HCFC free.

8. MAINTENANCE

The **Staff in charge of the appliance** must control and respect the expiry dates for maintenance, given in the table below, contacting the authorised **Technical Assistance** when indicated.

		FREQUENCY				Maintenance Manager
		Depending on Use and Necessity	Monthly	Every 6 months	Annual	
Cleaning the external surfaces		●				☐
Cleaning the accessible internal parts	①	●				☐
Check integrity of sealing gaskets			●			☐
Control of power supply cable/plugs and/or electrical sockets				●		☐
Condensing unit filter cleaning	②			●		☐
Clean the collection tank of the water used to clean the inside of the tank	②	●				☐
Condenser cleaning		●		●		☐
Check that the water inlet and outlet pipes are not leaking or damaged				●		☐
Check the compressor oil level	②			●		☐
Discharge the air tank	②			●		☐
Check pneumatic connections	②			●		☐
Check the integrity of chiller system piping				●		☐
Inspect cables and internal power connections				●		☐
Cleaning condensate drying sponges	②			●		☐
Clean the spray nozzle	②				●	☐
Replacing of lights / LEDS	②					■
Replacement of control panel (Electronic control unit - thermostat - etc.)						■
Replacing the power supply cable, plugs and/or electric sockets						■

☐ Routine Maintenance

☒ Extraordinary Maintenance

① Without using tools

② If present



ATTENTION

After all maintenance it is **mandatory** to perform all electrical safety tests in accordance with the IEC EN 50106 Standard.

9. FAULTS - TECHNICAL ASSISTANCE - USER

If the appliance is not working properly or stops working, **before contacting the Customer Support Centre**, perform the following checks according to the use of the appliance:

THE APPLIANCE IS NOT WORKING

CAUSE	SOLUTION
Blown protective fuse	Previously find the cause of the intervention of the switch, and then re-introduce the new fuse.
The master switch is open	Close the master switch.
The plug is not inserted	Insert the plug.
Electrical black-out	If the black-out should continue for a long time, transfer the product to an appropriate refrigerator.

THE TEMPERATURE IS NOT LOW ENOUGH

CAUSE	SOLUTION
Wrong temperature setting	Set the appropriate temperature.
Equipment being struck by currents of air or exposed to direct or reflected sunlight	Remove any draughts and prevent any direct or reflected sunlight.
Insufficient air flow for cooling to the condenser	Remove anything that may affect air flow inside the condensing unit (paper sheets, cardboard, grids with an insufficient number of holes, etc.).

THE COMPRESSOR DOES NOT START-UP OR OPERATES FOR A FEW MOMENTS

CAUSE	SOLUTION
No electric power supply to the appliance	• Check if there is a power cut. • Close the various switches on the power supply line.
Excessively low power voltage	Check that the network voltage of the power supply cable is of a rated value of 115V +/- 10%.
Set temperature too high	If the set temperature is higher than that of the air in the display compartment, the compressor is not activated. Set a more suitable temperature if the current value is not low enough.

THE TOUCH SCREEN DOES NOT REACT TO THE COMMANDS

CAUSE	SOLUTION
The display is dirty	• Clean the display. • Switch the appliance off and on again.

THE FOOD DOES NOT REACH THE REQUIRED TEMPERATURE

CAUSE	SOLUTION
Incorrect cooling cycle setting di raffreddamento	Check the program and make sure that the food is correctly distributed inside the cold room.
Incorrect distribution of the food on the trays	Check for anything obstructing the correct air circulation.
High thickness of the food	Reduce the thickness of the food.
Presence of cover or lid	Remove the cover or lid.

THE TEMPERATURE INDICATED BY THE PIN PROBE IS NOT CORRECT

CAUSE	SOLUTION
Incorrect insertion of the pin probe	Check that the pin probe is correctly inserted into the core of the product.
The pin probe is damaged	Use only timed or assisted programs. Contact the Technical Assistance Service for replacement.

10. TECHNICAL ASSISTANCE



THE TEMPERATURE IS NOT LOW ENOUGH

CAUSE	SOLUTION
Low ventilation	Replace the ventilators/fans.
Internal fans at standstill or with fans damage	Replace the ventilators/fans.
Thermostat / Electronic control board not efficient	Replace the thermostat/electronic control board. If the electronic control board is used on appliances with R290 coolant, it must only be replaced with an original spare part supplied by the manufacturer. Replace the temperature probes only after checking which of the two is not operating efficiently.
Condenser clogged with dust or dirt in general	Clean the condensing unit thoroughly. In particular operating environments (e.g. presence of dust, presence of excessive humidity, etc.) when the performance of the equipment deteriorates, the condenser requires careful cleaning.
Insufficient refrigerant charge in the refrigeration system	Find the cause of the loss of coolant and eliminate it. Top up the coolant. If necessary, empty the system before topping up.

THE COMPRESSOR DOES NOT START-UP OR OPERATES FOR A FEW MOMENTS

CAUSE	SOLUTION
Intervention of the maximum pressure switch (where present)	Check the reasons for the continuous triggering of the maximum pressure switch, such as: • Air condenser clogged. • Air condenser fan stopped. • Ambient temperature too high. • Pressure switch broken.

SPARE PARTS

<http://service.isaitaly.com/>

DATA BASE ENERGY LABEL


https://ec.europa.eu/info/energy-climate-change-environment/standards-tools-and-labels/products-labeling-rules-and-requirements/energy-label-and-ecodesign/product-database_en

ACCESS TO THE PROFESSIONAL REPAIR SERVICES

https://www.isaitaly.com/it/assistenza/	ITALY	Tel. +39 075 8017800	email: isaservice@isaitaly.com
	ABROAD		email: servicecall@isaitaly.com


11. STORAGE

The appliance, with or without its packaging, must be carefully stored inside warehouses or in areas protected from the weather and from direct sunlight, at a temperature of between **0** and **+104°F**.



12. PROLONGED APPLIANCE SWITCH-OFF

Remove the product contained in the refrigerated compartment and place it immediately in a suitable refrigerated container to ensure proper storage. Open the equipment and wait for it to reach room temperature and then clean it. Leave the door/sliding panels open by about **0.8-1.2 inch** so as to guarantee air circulation and prevent the formation of mould and bad smells inside the appliance. The appliance, with or without its packaging, should be carefully stored inside warehouses or in areas protected from the weather and from direct sunlight, at a temperature of between **0** and **+104 °F**.



13. INSTALLATION

To reduce the risk of flammability, the equipment must be installed by a suitably qualified person.
The equipment must be installed in accordance with the ANSI/ASHRAE 15 standard for the safety of refrigeration equipment.

13.1 UNPACKING




Remove the packing from the appliance by removing the screws that fasten it to the pallet. All packaging materials are recyclable and should be disposed of in accordance with the local regulations. Please destroy "plastic" bags to prevent them from becoming hazardous to children (suffocation).



ATTENTION

Handling of the equipment must only be performed using a forklift truck of adequate power (with respect to the weight of the equipment) operated by qualified personnel: during this operation the equipment must strictly be positioned on the pallet supplied.

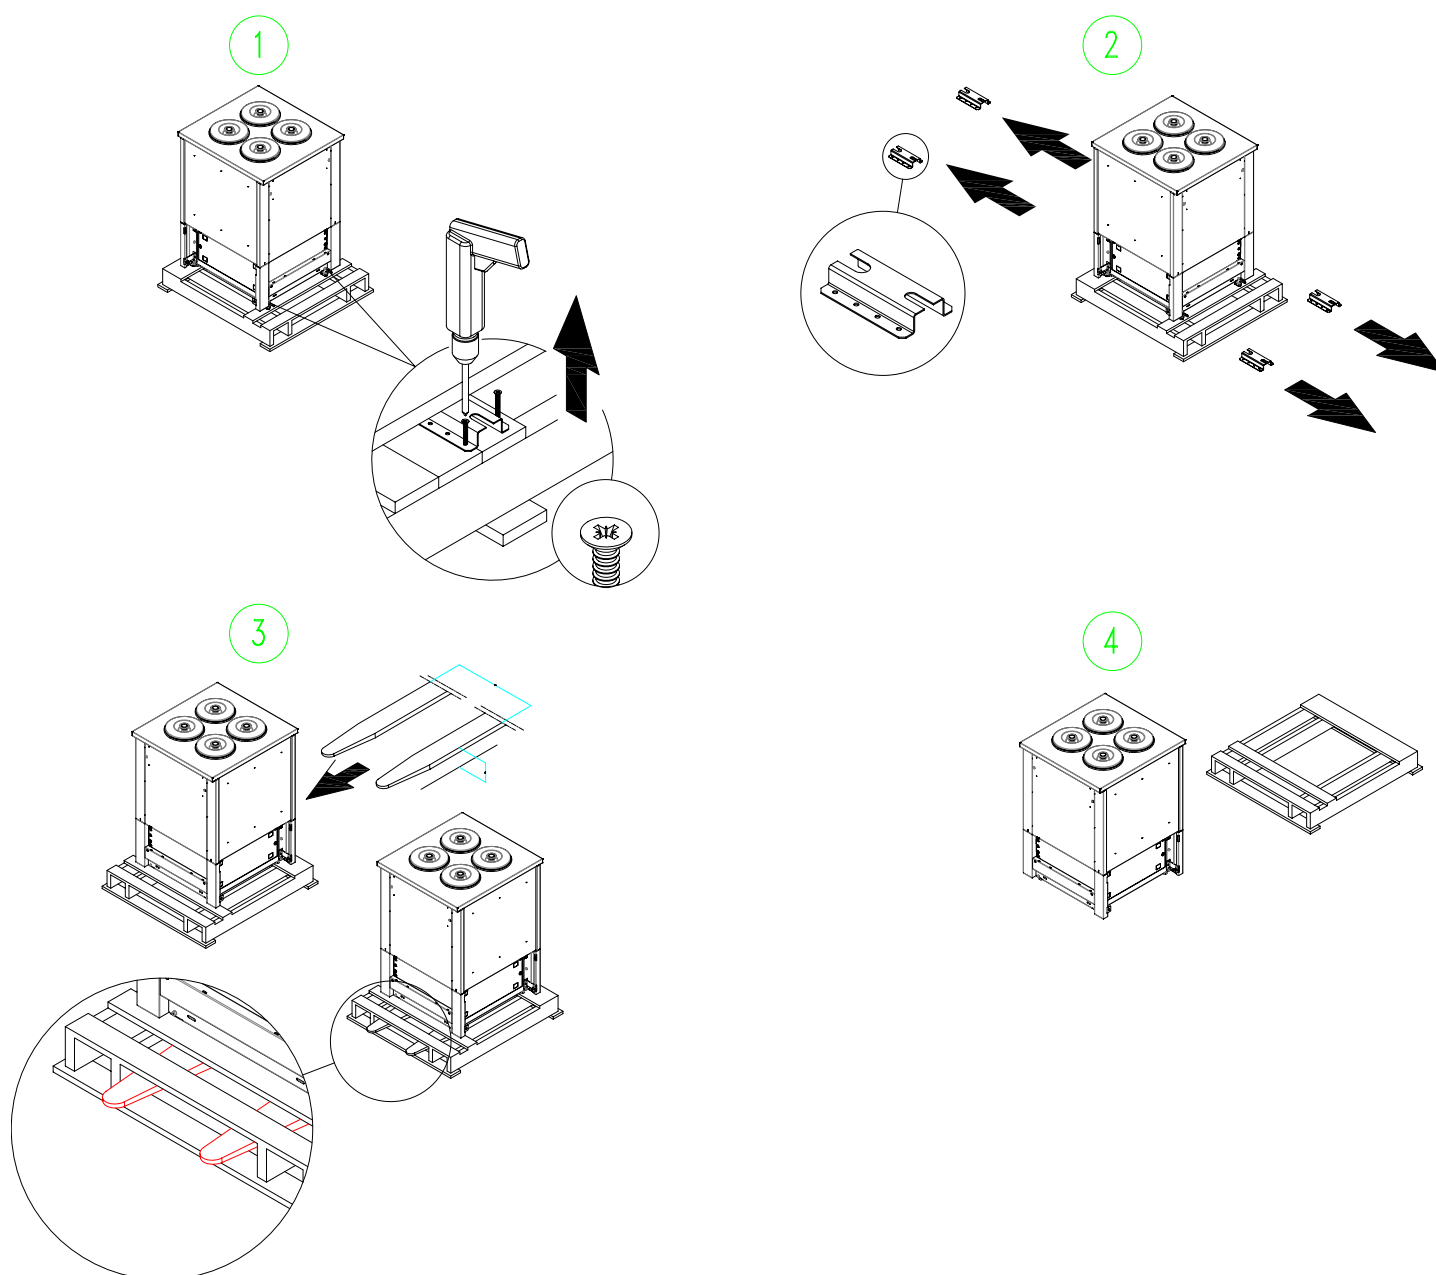

13.2 ENVIRONMENTAL CONDITIONS



ATTENTION

A dry room that can be ventilated is the suitable location for the appliance's installation.

There should be a good airflow around the compressor/condenser. Therefore the area around the unit should not be obstructed by boxes or other objects.

Place the equipment away from heat sources (radiators, heaters of any kind, etc.) and far from the influence of continuous air movement (caused by fans, air conditioning units, etc.).

If it is unavoidable to install near a heat source, use a suitable insulating plate.

Also avoid exposure to direct sunlight; all of this causes the temperature inside the refrigerated compartment to rise with negative consequences on operation and energy consumption.

THE EQUIPMENT CANNOT BE USED OUTDOORS AND IT MUST NOT BE EXPOSED TO RAIN.

13.3 ELECTRICAL CONNECTION



ATTENTION

Check that the mains voltage corresponds to that indicated on the appliance rating plate and that the required power is adequate.

Check on the socket that the power supply voltage provides rated voltage ($\pm 10\%$) when you start up the compressor.

The plug should be directly connected to the electrical socket. It is forbidden to connect the plug to the socket by means of multiple socket extensions or adaptors.

The plant power supply socket must be fitted with a disconnecting device (dimensioned according to the load and in compliance with the standards in force), which guarantees complete disconnection in case of category III (3) over-voltage conditions and therefore protects the circuits against earth faults, overloads and short circuits.

DO NOT PLACE THE CONNECTION CABLE IN A TRANSIT AREA.



ATTENTION


Remember that **earthing** is necessary and **is a requirement imposed by law**.

13.4 POSITIONING ON THE WALL



ATTENTION

It is essential for correct installation to observe the indicated distances (mm).

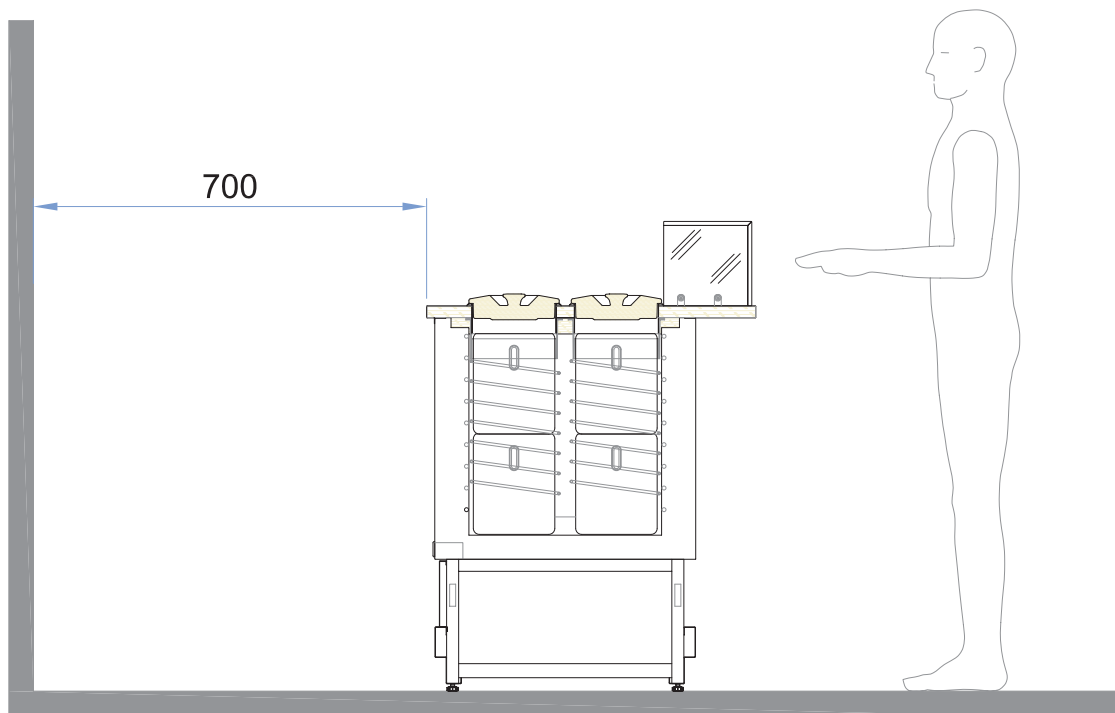

13.5 POSITIONING / INSTALLATION



HEIGHT-ADJUSTABLE FEET

The equipment is equipped with height-adjustable feet.



It is absolutely necessary after positioning to stabilise and level the equipment on the floor using the adjustable feet as indicated. equipment is fitted with height-adjustable feet.

Note: All adjustable feet must touch the ground.

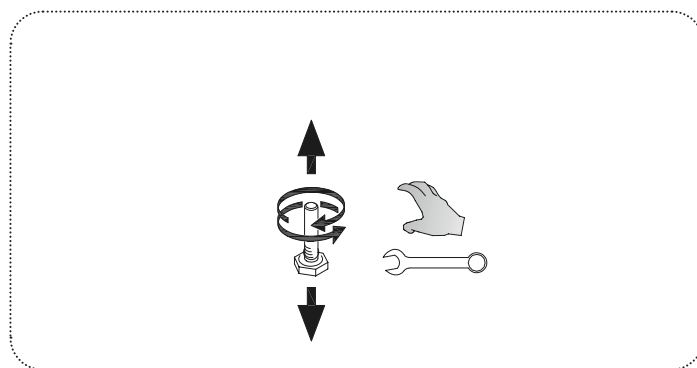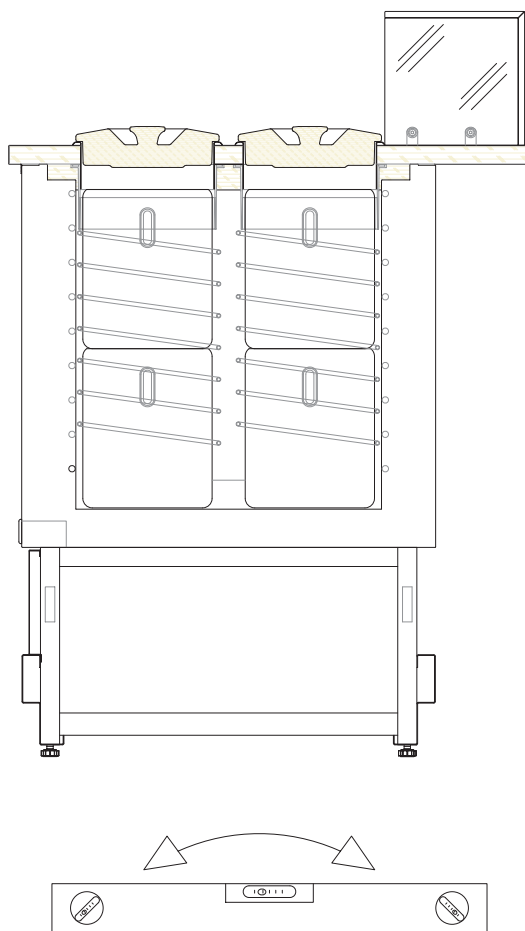

14. COMPOSITION

The appliance consists a singular cabinet, on which all devices necessary to make it a professional and efficient product for its declared use, are installed.

The appliance consists of:

Refrigeration	Ventilated
Installation	Plug-in / Remote
Electrical connection	Schuko 220V 16A
Control panel	Electronic
Height-adjustable feet	Swivel Castors with brake

15. USE

The equipment is intended to be used in professional and similar applications, as indicated below:

- Staff kitchen areas in shops, offices and other workplaces.
- Farmhouses and customers of hotels, motels and other residential environments.
- Bed and breakfasts.
- Catering and Retail applications.
- Bar and Restaurants.



Non-permitted uses:


- Storage of explosive substances such as spray cans with flammable propellant.
- Displaying and/or preserving of non-food products (chemicals, pharmaceuticals, etc.).

The equipment can be used exclusively for:

- Ice Cream

The manufacturer is not liable for injury to persons or damage to property or the appliance itself caused by the displaying of products other than those described above.


THE APPLIANCE IS INTENDED FOR PROFESSIONAL USE

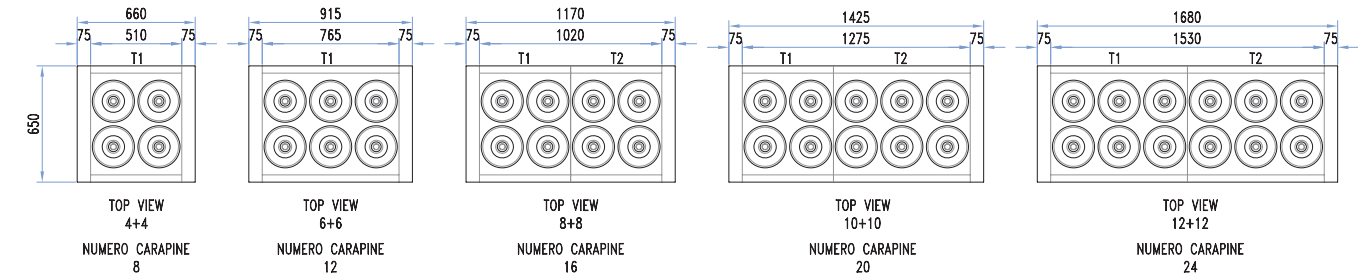





















ATTENTION








It is absolutely forbidden to place weights on the indicated surfaces.

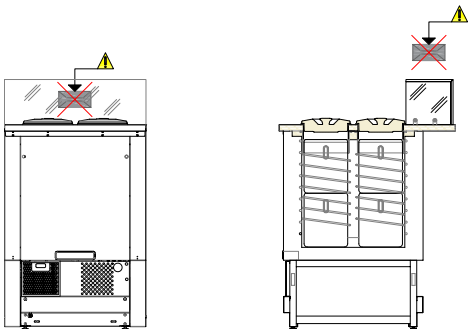


16. TECHNICAL SPECIFICATIONS

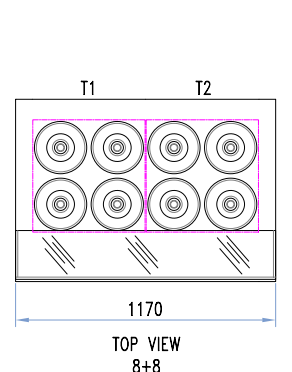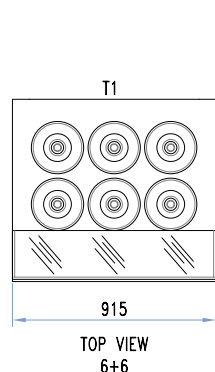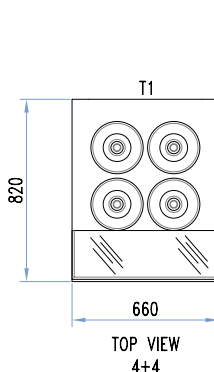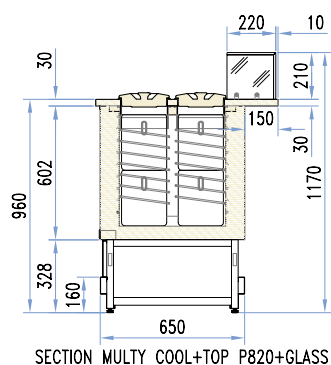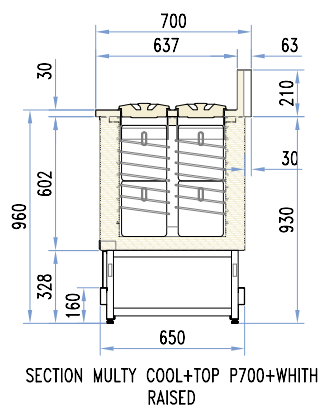

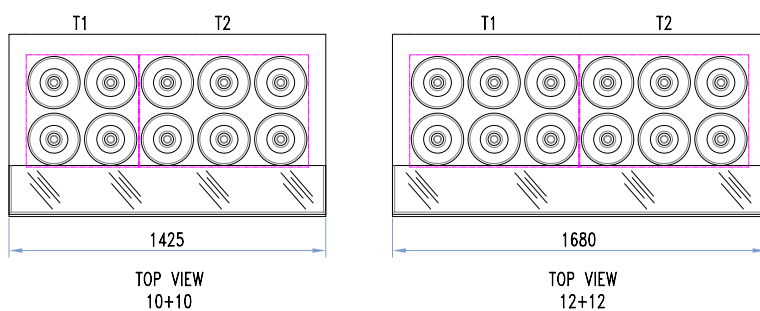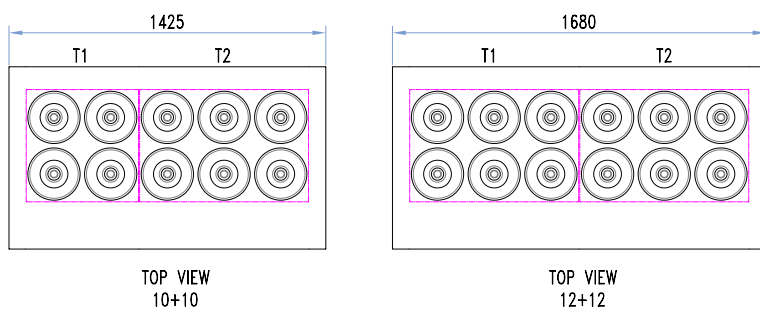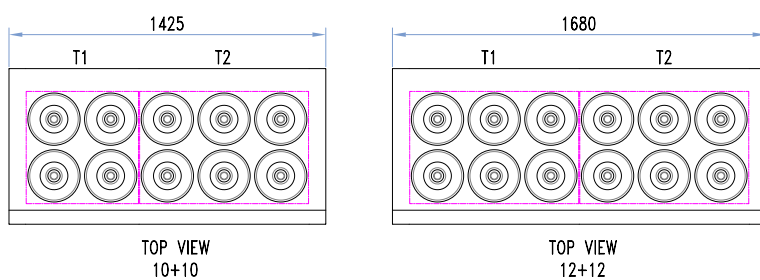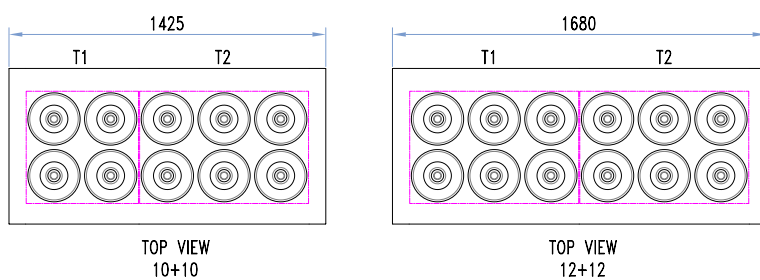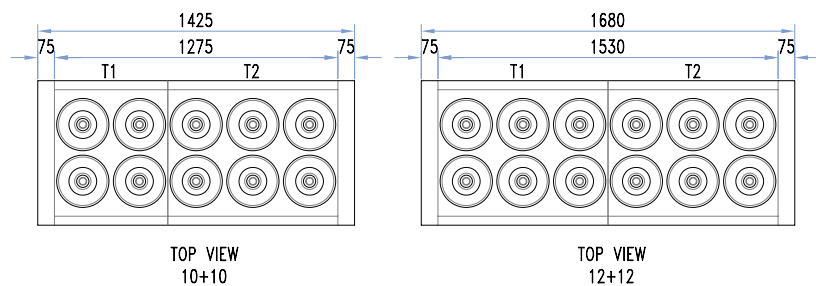


L 3060 MM

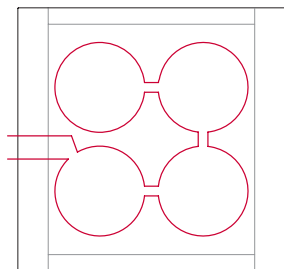

TOP VIEW
4+4


L 4590 MM

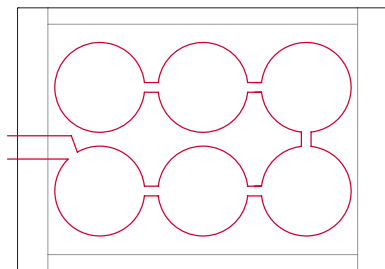

TOP VIEW
6+6

L 3060 MM


L 3060 MM

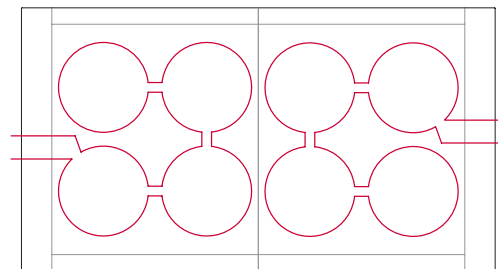

TOP VIEW
8+8

L 3060 MM


L 4590 MM

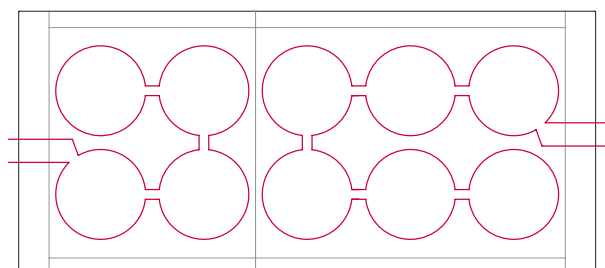




TOP VIEW
10+10


L 4590 MM

L 4590 MM

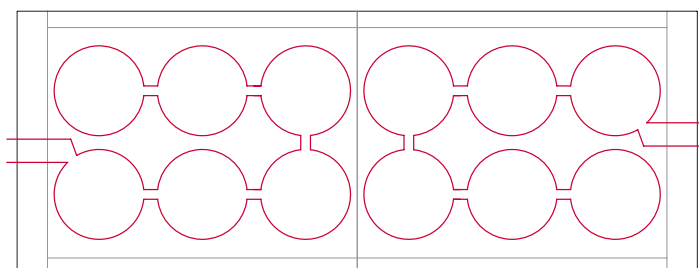


TOP VIEW
12+12

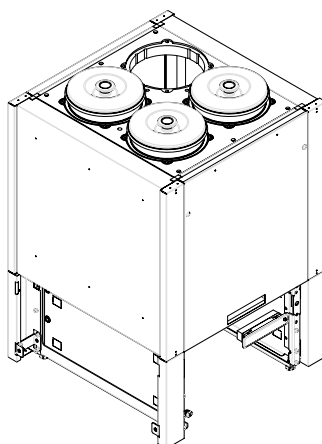


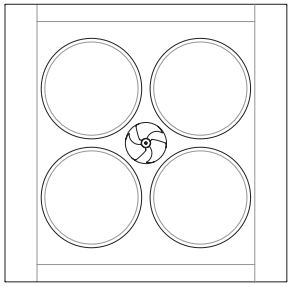


TOP VIEW
4+4

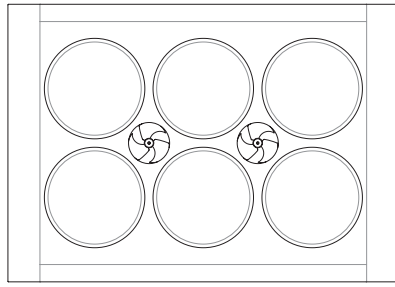


TOP VIEW
6+6

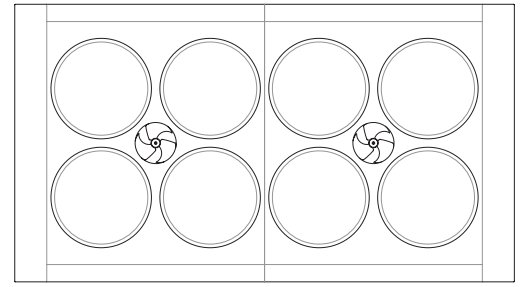

TOP VIEW
8+8

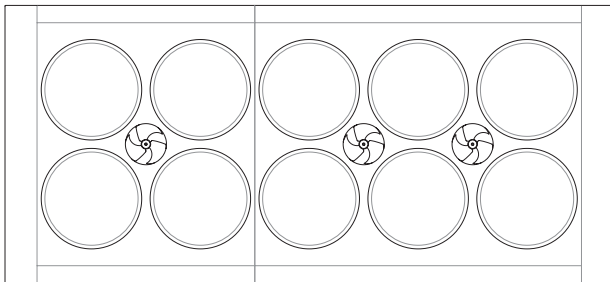

TOP VIEW
10+10


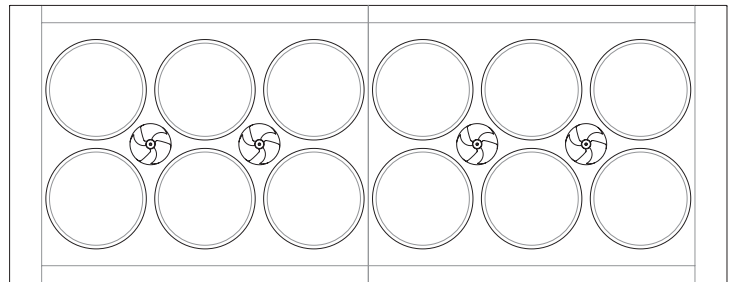


TOP VIEW
12+12

17. CONTROL PANEL


START-UP (ON)

Activate the mains system master switch.
Plug the appliance in the socket supplied by the customer, ensuring that the plug is fitted with an earth contact and that there are no multiple sockets connected to it.





POWER OFF (OFF)

Remove the power plug from the socket supplied by the customer.




THE EQUIPMENT STARTS AUTOMATICALLY

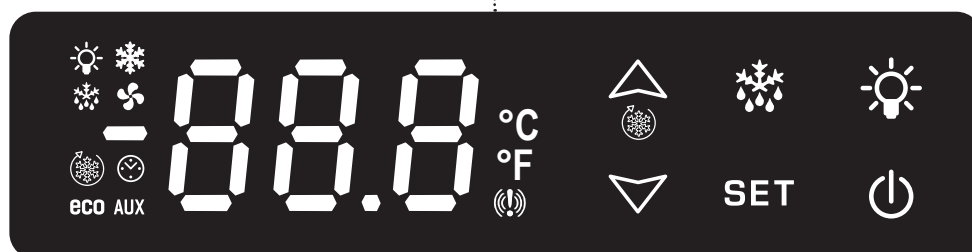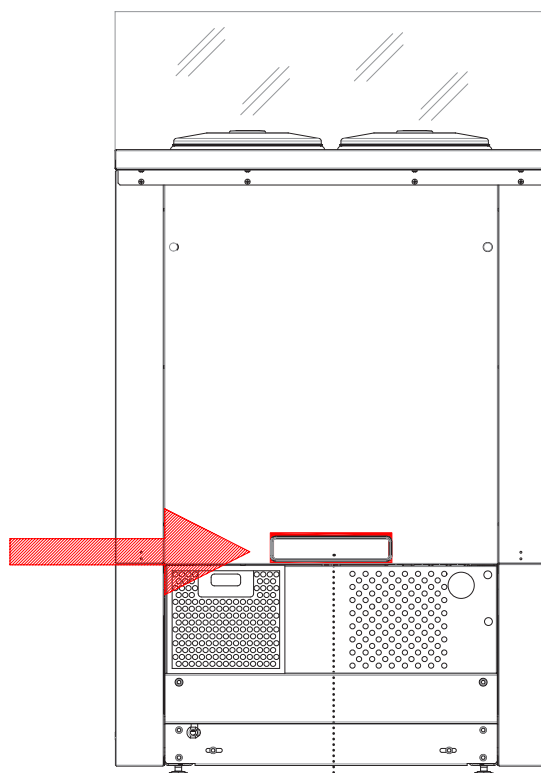

ATTENTION

The electronic control unit is installed already programmed; any changes to the control unit settings can only be performed by qualified technical personnel.

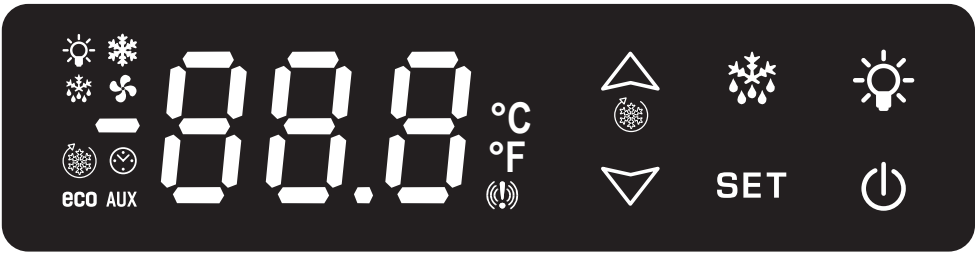


SINGLE PRESS KEYS

	SET	To view or edit the set-point. While programming, select a parameter or confirm a value.
	SBR	To start a manual defrosting cycle (press the button for at least 2 seconds).
	UP	To see the maximum temperature. While programming, it scrolls through the parameter codes or increases their value. When held pressed for at least 3 seconds the continuous cycle starts.
	DOWN	To see the minimum temperature. While programming, it scrolls through the parameter codes or decreases their value.
	ON/OFF	It turns the instrument on or off.
	ON/OFF	LIGHTING Press the key from 1 to 3 seconds to switch the lighting on or off.

COMBINED PRESS KEYS

	+		To lock or unlock the keyboard.
	+		To enter the programming function.
	+		To exit the programming function.

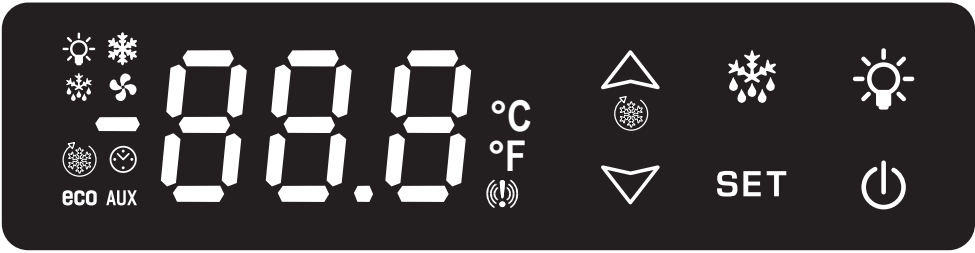


LED

	Mode	Meaning
	On	Compressors active
	Flashing	Delay against close start-ups
	On	Defrosting in progress
	Flashing	Dripping in progress
	On	Temperature alarm
	On	Continuous cycle in progress
eco	On	Energy saving in progress
	On	Lighting on
°C	On	Unit of measurement
	Flashing	Programming

ALARMS

P1	Broken thermostat probe
P2	Broken evaporator probe
HA	High temperature alarm
LA	Low temperature alarm
EA	External alarm
CA	External alarm (i1F=bAL)
dA	Door open
CA	Pressure switch alarm (i1F=PAL)

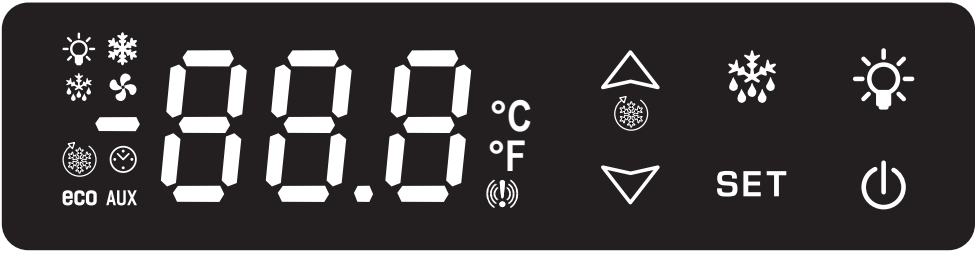

FUNCTIONS

TEMPERATURE



MINIMUM

- 1. Press and release the key; the message "Lo" will be displayed followed by the minimum temperature reached.
- 2. Press the key or wait 5 seconds to display the normal temperature again.



MAXIMUM

- 1. Press and release the key; the message "Hi" will be displayed followed by the maximum temperature reached.
- 2. Press the key or wait 5 seconds to display the normal temperature again.



CANCELLATION

- 1. When the saved temperature is viewed, hold the SET button pressed for a few seconds (the letters rSt appear).
- 2. To confirm, the letters rSt will begin to flash.

SET-POINT



DISPLAY

- 1. Press and release the key; the set-point will immediately be displayed.
- 2. To view the temperature again wait 5 seconds, then press the key again.



CHANGE

Press the key for at least 2 seconds; the set-point will be displayed and the LED °C starts to flash.



To change the value use the **DOWN / UP** keys.



To save the new set-point press the **SET** key or wait 15 seconds to exit the programming function.

KEYBOARD



LOCK

Hold the keys pressed for a few seconds until the letters "POF" start to flash: the keyboard is locked (only the set-point and minimum and maximum temperature can be viewed).

UNLOCK

Hold the keys pressed for a few seconds until the letters "POn" start to flash: the keyboard is unlocked.

18. CLEANING

The materials listed below must be cleaned as follows:

STAINLESS STEEL

Only use warm water and non-aggressive detergents and then rinse.

ACRYLIC / POLYCARBONATE

Wash with lukewarm water, using a soft cloth or a chamois cloth.

CURVED GLASS

Only use products specifically designed for cleaning glass.

It is advisable not to use tap water which could leave limescale residues.

18.1 INTERNAL (GENERAL)




ATTENTION

Do not scrape ice from the walls with pointed tools, the surface could be damaged.
Do not use high pressure appliances (e.g. steam generators).

Remove the product from the refrigerated compartment and immediately place it in a suitable refrigerated holding cabinet to ensure proper storage.

Turn off the equipment.



Remove the manually removable accessories (e.g. sliding doors, grids, ice cream containers, etc.).

Wait at least 4 or 6 hours for any ice present on the evaporator to melt completely, before cleaning the equipment. We suggest, in this regard, to wait for the next day to make sure that defrosting is completed. Do not use mechanical devices or other means to accelerate the process of defrosting other than those recommended by the manufacturer.

Remove (if present) the drain plug at the bottom of the tank to drain the defrosted water. It is recommended to apply a rubber tube or other suitable material in the drain hole in order to facilitate the exit of liquids.



ATTENTION

For the correct operation of the appliance make sure that the drain plug is reinserted correctly and completely after cleaning.

Clean the side panels and the bottom of the tank using a mild detergent, warm water and a cloth or a non-abrasive sponge. Do not use sharp tools. Rinse thoroughly and dry with an absorbent cloth.

If the appliance is connected to a drain on the ground, run lukewarm water containing a sanitising solution suitable for the specific use. The quantity of solution to be used must be such as to ensure one perfect removal of any product residues and proper sanitation along the entire drainage path.

If the appliance is not connected to a ground drainage, follow the procedure described in the previous point.
The rinse water collected in the tank will be positioned inside the base of the appliance.
Proceed to also clean and disinfect the collection tray.



Refit the accessories previously removed.

Turn on the equipment.




Let the appliance cool down until it reaches the desired temperature before reintroducing foods.

18.2 CONDENSING UNIT

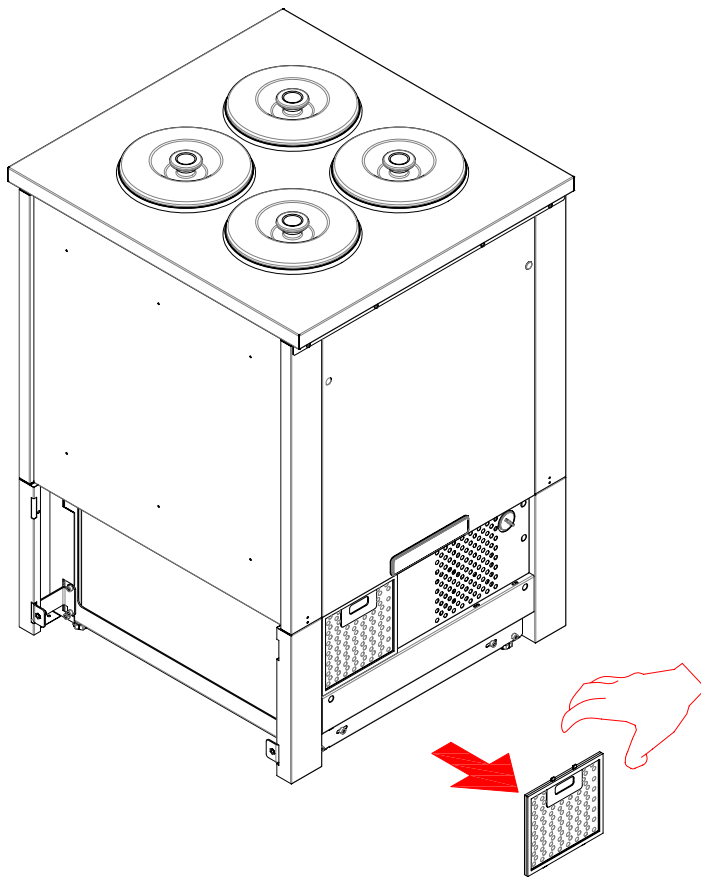


OR



Turn off the appliance and wait a few hours until all the condensing unit appliances have reached a temperature that is close to room temperature.


Remove the rear grille as indicated.

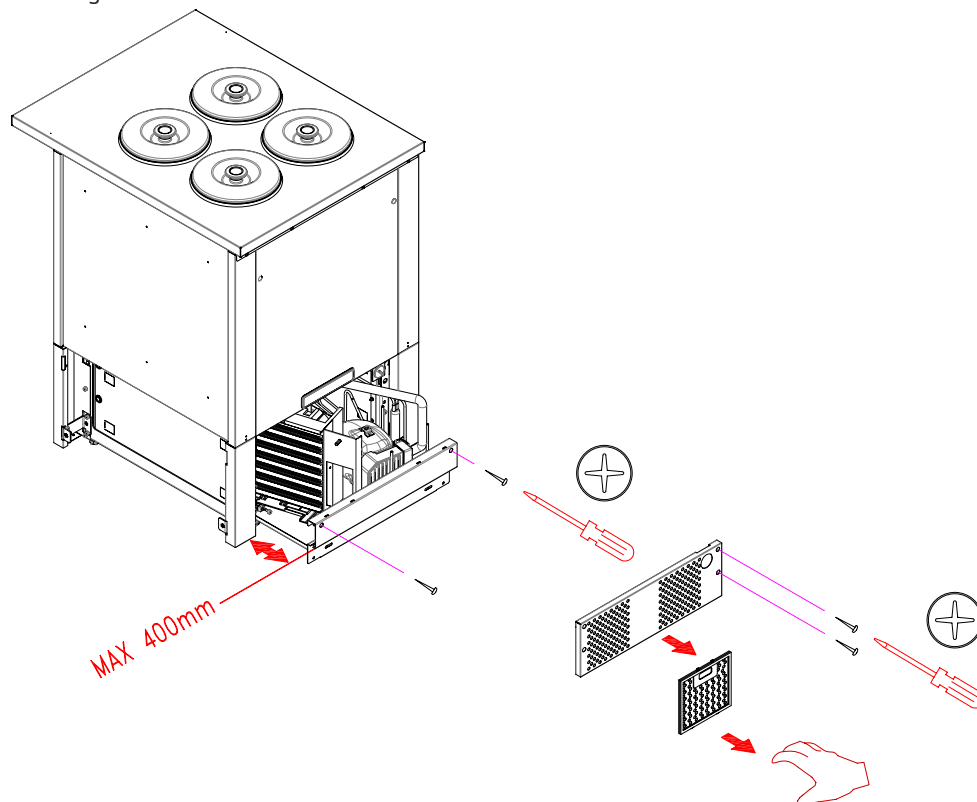

Clean the condensing unit using a dedicated soft bristle brush and a vacuum cleaner; carry out the operation taking care not to bend the condensing unit springs.

	FREQUENCY	
	According to Use and Requirement	Every 6 months
Condenser cleaning	●	●

18.3 DEFROST WATER COLLECTION TRAY (IF PRESENT)

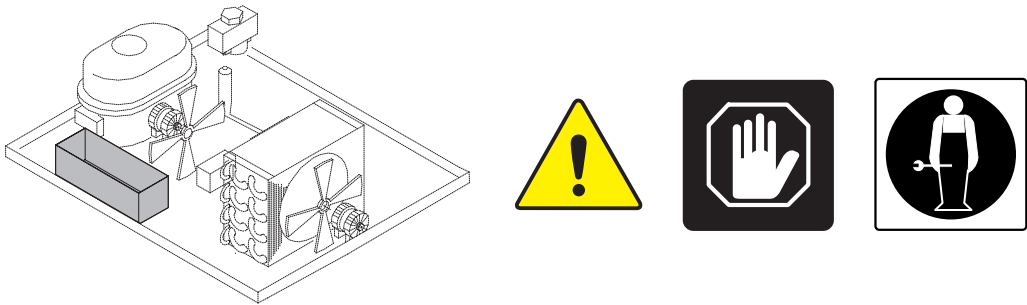

Clean based on use and as needed and in certain environmental conditions (e.g., high humidity, low environmental temperature, presence of dust, etc.) in order to avoid the incorrect and complete evaporation of the water and/or the presence of unpleasant odours.

- Sanitise** the tray with specific products.
- Disinfect** the tray with suitable products.



ISA S.p.A.

via Madonna di Campagna 123
06083 Bastia Umbra (PG)
Italy

T. +39 075 801 71

E. customerservice@isaitaly.com

www.isaitaly.com